



NATIONAL STORAGE EDMONTON

Building B Internal Fitout & Upgrades

Scope of Works



January 2022
Revision A


Table of Contents

BACKGROUND	4
1.1 Introduction	4
1.2 Historical	4
Specific Scope Items	
2.1 Stairs	5
2.2 Mezzanine Floor	6
2.3 Unit Fitout – Mezzanine Level.....	7
2.4 General & Emergency Lighting, including General Power Outlets.....	7
2.5 Loading Dock.....	8
2.6 Painting of Building B Ground Floors (Hallways & Units) & Sealing of Mezzanine Level.....	9
2.7 Smoke Detection & Portable Fire Extinguishers	10
2.8 Evacuation Diagrams.....	10
Quoting	
3.1 Quote Structure Requirements	10

BACKGROUND

1.1 Introduction

Building B had numerous leaks in the roof, along with old service flashings failing. The roof replacement was completed on the 17th of December 2021. The Mezzanine floor within the same building is beyond patching, it requires full replacement. The floor of the lower level also requires cleaning and painting. There is a need to replace the current stairs which are non-compliant and install 2 new sets of stairs in opposite corners for general and emergency egress.

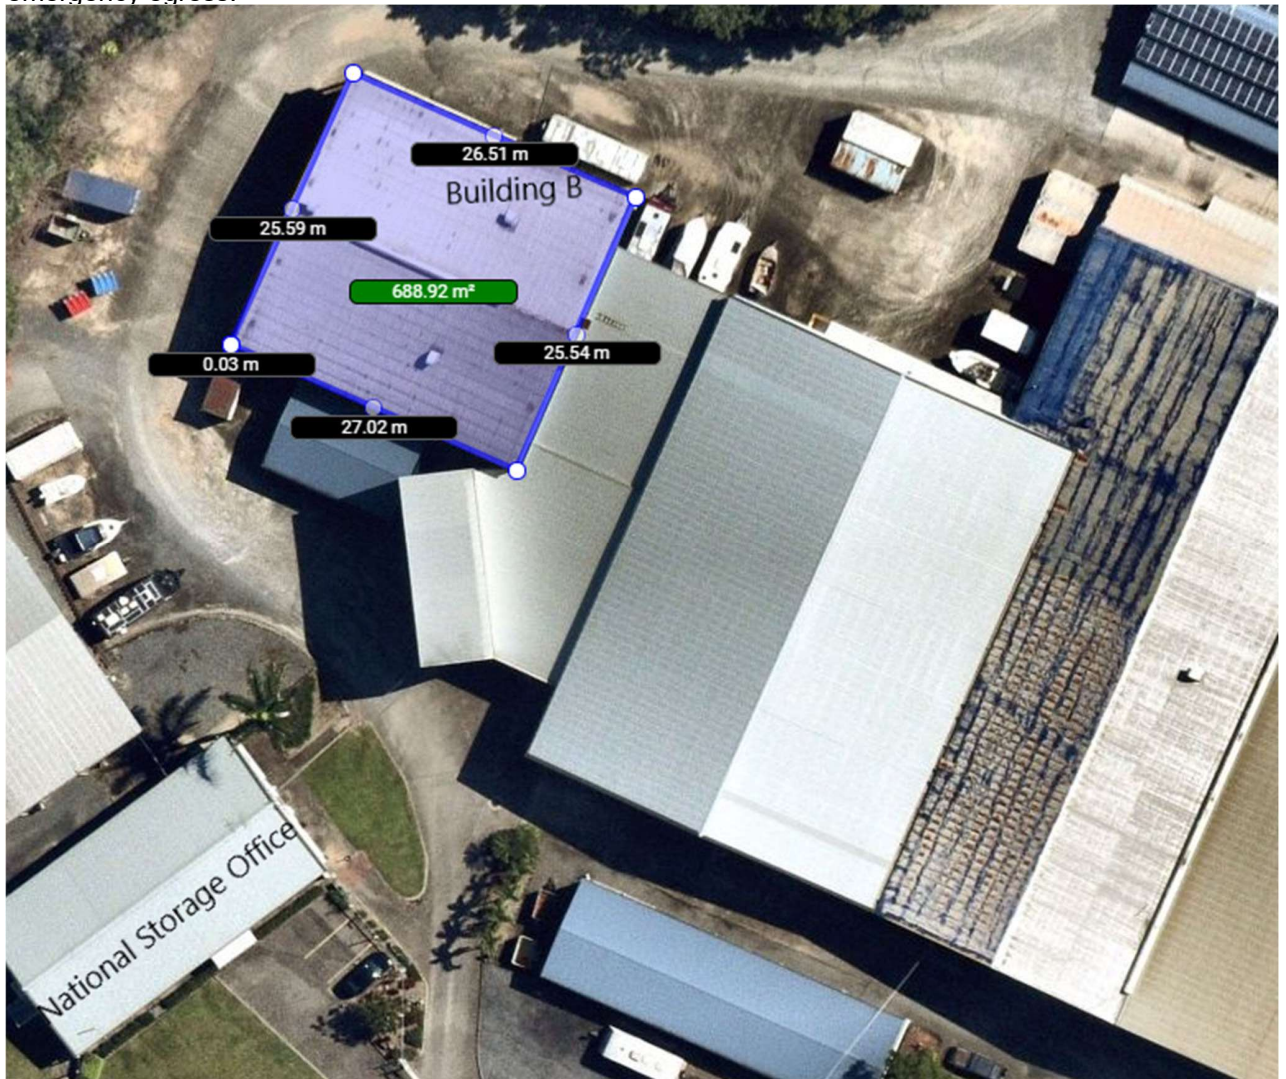

1.2 Historical

In 2019 the roof was patched extensively for water leaks whilst an adjacent roof was replaced. The patching let go through 2020, causing more damage to the mezzanine floor, and making the ground floor units in the building unrentable, resulting in all customers except two vacating the area. Units 124, 122, 148 & 147 remain occupied.

SPECIFIC SCOPE ITEMS

2.1 Stairs


There is only one set of stairs servicing the mezzanine level, and these are not code compliant for Self Storage.

- Remove existing stairs (images below)
- Create new openings in floor (including modifying bearers, joists, flooring, and posts) to create a compliant landing on the upper level for the installation of compliant stairs. Top of floor to top of floor is approximately 3005mm
- Install compliant stairs & handrails (reference images below of stairs at National Storage North Lakes) All stairs, ramps, handrails, and balustrades are to comply with building code of Australia, section D & AS 1428.1
- Include Tactiles @ top & bottom as per code requirements.

Existing Edmonton Stairs



North Lakes Stairs

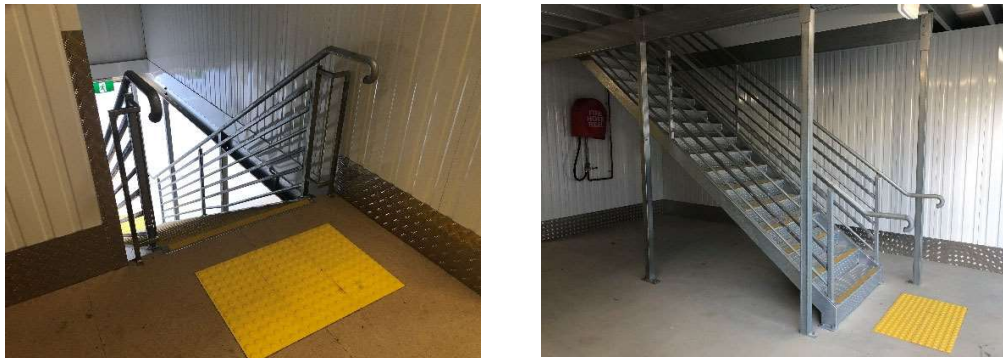

2.2 Mezzanine Floor

. The joists are 150x50mm box @ 450mm centres

- Remove the existing handrail
- Remove existing flooring to entire mezzanine in Building B
- Remove any existing fixings and adhesive on existing floor joists
- Dispose of all removed flooring and associated waste
- Install new 22mm Red tongue STRUCTAFlor flooring with H2 Termite treatment to mezzanine with subfloor adhesive and screws as per manufacture's specifications.
- Provide in the quote the overall meterage of flooring being installed



2.3 Unit Fitout – Mezzanine Level

Fitout of mezzanine level with Self Storage industry standard finishes as per Unit Layout Plans provided.

- Hallway Walls - Panels & channels to be Colorbond Surfmist
- Internal Unit Walls - Sheeting to be interlock style. Sheeting and channels to be Zincalume
- Top of all walls to be 150mm below ceiling
- Walls to be adequately braced off ceiling
- Bumper Rails to be installed on all mezzanine hallway walls, including existing building walls in common areas at 260mm & 1100mm (top of rail)
- On each external hallway corner wall, install 1200mm high aluminium checkerplate protection angles.
- Hallway walls to be secured to internal walls at intersections
- Swing door opening heights to be 2000mm
- Swing doors to be Colorbond Shale Grey.
- Make good ceiling penetrations, flash with Surfmist Colorbond.
- Install meshed louvered vents x 2 as per plan provided 1000mm W x 1800mm H
- Allow to reconfigure units on ground floor to suit new stairs, utilise existing roller doors and paneling for additional units where existing stairs are to be relocated.
- Supply & install unit numbering to new fitout. PVC card (PMS116) 110mm HT x 200mm W

2.4 General & Emergency Lighting, including General Power Outlets

- D&C Lighting layout
- Existing lighting/circuit to be removed, new circuits to be installed from nearest Sub-Board. Include RCD
- Exit signs and emergency lights to comply with AS 2293 (Maintained)
- General Lighting - LED Smart Step Dimming Sensor Fittings Spaced @ a maximum of 5m apart.
- Emergency Lighting - Industialight VTN-D (Twin Diffused Polycarbonate LED Batten Fixture) (As per D&C Layout)
- Install 4 x General Power Double Outlets on mezzanine level and 2 x General Power Double Outlets on ground level, at a height of 1800mm. All with lockable covers, on same circuit with RCD (Safety Switch) protection for the circuit. As per Unit Layout Plan provided. Clipsal Weather Protective Box, 137x110x77mm, with Clear Lid and Locking Provision Item Number: 255-GY. Clipsal 2000 Series Twin Switch Socket Outlet 250V, 10A Item Number: 2025-WE
- Provide in the quote the quantities to be supplied and installed for each of the following: general, emergency & exit path lighting.



2.5 Loading Dock

Due to no lift/hoist in the building there is a requirement for an alternative procedure for customer's goods to be transported to and from the mezzanine level of Building B. The addition of an upper-level loading dock creates numerous safety concerns; therefore, a number of safety measures are required.

Create a loading dock on the upper level for the placement and pick up of a purpose-built furniture cage, with specific safety measures installed to prevent persons accessing the open loading dock where there is a fall hazard.

- Remove the existing external industrial Roller Door
 - Extend the mezzanine floor to outside of the building cladding across the opening, increase the strength of the outer members of the extended mezzanine floor (Double Joists), and add a 3mm C type flashing to cover the edge of the flooring and floor members. (Checkerplate Aluminium is suitable)
 - Increase the height of the upper loading dock opening to 2400mm from the mezzanine floor level. Make good opening by framing and flash/sheet all side gaps fully between the internal paneling and outer cladding.
 - Install a 3000mm wide remote-controlled motorised roller door to the outer of the new opening, framing, and sheeting externally with hallway paneling (no gaps to edges), with the roll sitting in the void above the opening and the bottom of the door flush with the underside of the opening when fully open.
 - New roller door to close within 50mm of new mezzanine floor outer edge. Securely install 100mmx50mmx3mm RHS for new roller door as stiffener for fixing door guides and brackets to.
 - **Internally on the mezzanine level, install a hallway wall to create an area for the loading dock as per the provided plan.**
 - Within the newly internal installed loading dock wall, install a 2000mm HT x 2500mm W remote controlled roller door, as per the plan provided.
 - Safety Measure- Install Aritech 2202AU-L Overhead Door Cl.Loop (Supplier Hills) reed switches to the external & internal loading dock roller doors.
 - External roller door not to open unless internal roller door is closed, reed switch on internal roller door having a closed circuit to enable external roller door to open..
 - Internal roller door not to open unless the external roller door is closed, reed switch on external roller door having a closed circuit to enable internal roller door to open.
 - Safety Measure- Supply & install PIR motion detector in loading dock area. External roller door not to open when PIR motion detector detects motion.
-
- Supply & install 2 x double general power outlets to suitable locations within internal loading dock area, adjacent loading dock roller doors so proprietary power leads of roller door motors can be safely plugged in.
-
- Supply & install an awning to the full width of the opening, extending out from the building cladding 3000mm. Structural Steel to be hot dipped galvanised. Awning to be attached to the building and flashed at connection to make watertight. Underside of awning frame to be level with new opening, 2400mm from top of mezzanine floor. Frame and sheet sides of awning structure to 300mm from the ground. (Awning structural engineer design to be included) All Trimdek sheeting & flashings to be Zincalume.



2.6 Painting of Building B Ground Floors (Hallways & Units) & Sealing of Mezzanine Level

Due to staining from water ingress and being an old cold room building, the ground floor concrete surface requires painting to enhance the area and remove the signs of water staining, so customers are not deterred from storing in the building.

- Clean all Building B ground floor surface areas as per the requirements of the paint manufacturer's preparation specifications.
- Supply and install two pack epoxy floor coating primer (Durebild STE PT light grey DULUX)
- Supply and install two pack epoxy floor coating (weather max hbr light grey top coating with non /slip coating Dulux)



- On completion of the mezzanine flooring, the whole floor is to be cleaned and sealed using **Epimax 999 WB** as per the manufacturer's specifications. https://www.epimax.com.au/wp-content/uploads/2017/07/EpiMax_999WB.pdf
- Provide in the quote the meterage of mezzanine floor to be sealed and ground floor to be painted
- All existing walls, including floor channels, on the ground floor are to be cleaned and treated for mould.

2.7 Smoke Detection & Portable Fire Extinguishers

Supply and install photoelectric smoke detectors throughout the ground level, mezzanine level, & roof space as per plans provided.

Supply and install 4.5KG AB:E dry powder fire extinguishers throughout the ground & mezzanine level, as per Australian Standards.

- Supply & Install 2012/24AUSI smoke detectors as per as per plans provided.
 - Install expanders and connect smoke detectors back to office alarm system
 - Commission smoke detectors into their own area on office alarm
 - Test & commission to monitoring centre
-
- Portable fire extinguishers to comply with AS 2444.
-
- Provide in the quote the number Smoke Detectors and Portable Fire Extinguishers.

2.8 Evacuation Diagrams

Evacuation Diagrams specific to the layout for Building B

- Install Evacuation Diagrams in locations nominated on the Building B Unit Layout Plans provided.
- Approval by the National Storage Property Services Manager, Ross McAllan, required prior to production & installation of each Evacuation Diagram.

2.9 CCTV – Additional Cameras

Installation of CCTV cameras at various locations within Building B and outside new loading dock.

- Install 6 x 5mp (minimum) varifocal CCTV cameras as per locations on the plans provided.
- Cable to nearest CCTV network switch
- Commission to Nuuo Crystal sever with new licenses

3.1 Quote Structure Requirements

Requested quote structure

- Each section to be costed separately, with all items in each section included
- Specific items requiring quantities and rates to be itemized within each sections costing

