

GENERAL

Do not scale from these drawings, figured dimensions take precedence at all times - when in doubt consult the designer prior to commencing construction. It is the builders responsibility to:

- Verify all dimensions and levels on site.
- Ensure all boundary setbacks are strictly adhered to.
- Verify location and levels of all services on site.
- Verify that floors and finished levels enable connection to required services on site.
- Real property information to be confirmed by licensed surveyor prior to construction.
- Bearings have been corrected by modelling software to read in a clockwise direction. This may cause discrepancies of 180 deg from original survey information.
- Site levels, driveway design & site works to detail by others.

These drawings have been prepared for building permit application only. It is the builder's / proprietor's responsibility to further interpret the design and drawings to detail the project for construction.

TERMITES

Protection against subterranean termites to be in accordance with A.S. 3660 Part 1. (protection of buildings from subterranean termites). Protection against subterranean termites to apply to all "primary building elements". The builder is to provide physical barriers to the entry by subterranean termites by construction of all slabs & timber floor framing in accordance with A.S. 2870.1 (Residential footing and slab construction), and A.S. 3600 (Concrete structures code). In addition all slab penetrations are to be protected using stainless steel mesh. (Termimesh or equivalent fitted to manuf. spec.). External perimeter barrier to be installed by excavation trenches, treating the exposed trench and backfilling the trench with treated material and protecting the trench with a 50mm thick concrete cover strip x 300mm wide measured from the external wall of the building. 2 durable notices shall be installed in prominent locations stating method of protection, date of installation, life expectancy and scope and duration of future inspections. Regular inspections of the building are to be carried out to ensure the barrier has not been bridged by termites. Inspections are to be carried out as per notices.

NOTES

All plumbing fixtures and installations including pressure limiting devices, hot water systems and dual flush toilet suites to be WELS rated in accordance with AS/NZ 6400 - 2005 & AS 3500, and in compliance with Part 4.1 of the Queensland Development Code (QDC).

All wet areas are to be waterproofed in accordance with Clause 3.8.1, Vol 2 of NCC.

All glazing is to be installed in accordance with Clause 3.6, Vol 2 of the NCC.

Stairways are to be installed in accordance with Clause 3.9.1, Vol 2 of the NCC.

Handrails and balustrades are to be installed to comply with Clause 3.9.2, Vol 2 of the NCC.

Masonry to comply with AS 3700. External fixtures & fittings to be non-combustible & hot dip galvanised or of corrosion resistant material.

Confirm all dimensions and design information on site prior to commencement of work.

STORWATER

Surface water drainage must be prevented from entering the building with fgl sloping 50mm over the first 1m away from the building & the finished slab height at a minimum FFL 150mm above FGL or minimum 100mm above FGL in sandy, well drained areas of low rainfall intensity (Q20 125mm), or 50mm above impermeable paved or concreted areas all in accordance with BCA Vol 2 P3.1.2.3

DRIVEWAY

- 3m minimum width (AS 2890:2004 Amdt1, S2.6.1)
- Maximum 1 in 4 (25%) gradient (AS 2890:2004 Amdt1, S2.6.2)

Changes in grade for straight driveways to prevent vehicle scraping driveway require grade transitions of 2m in length when:

- Summit changes in grade is over 1 in 8 (12.5%)
- Sag changes in grade is over 1 in 6.7 (15%) (AS 2890:2004 Amdt1, S2.5.3(d))

Builder is to follow the best practice guidelines for controlling stormwater pollution from building sites by local council


The builder is responsible to check all existing services prior to beginning construction

REAL PROPERTY DESCRIPTION

Lot: 239 On: RP48111  
Lot / Site Area (m²): 506 m²  
Local Government: NOOSA SHIRE COUNCIL

STATUTORY INFORMATION:

Building Classification: 1a  
Storeys: 2  
Climate Zone: 2  
Wind Category: N3

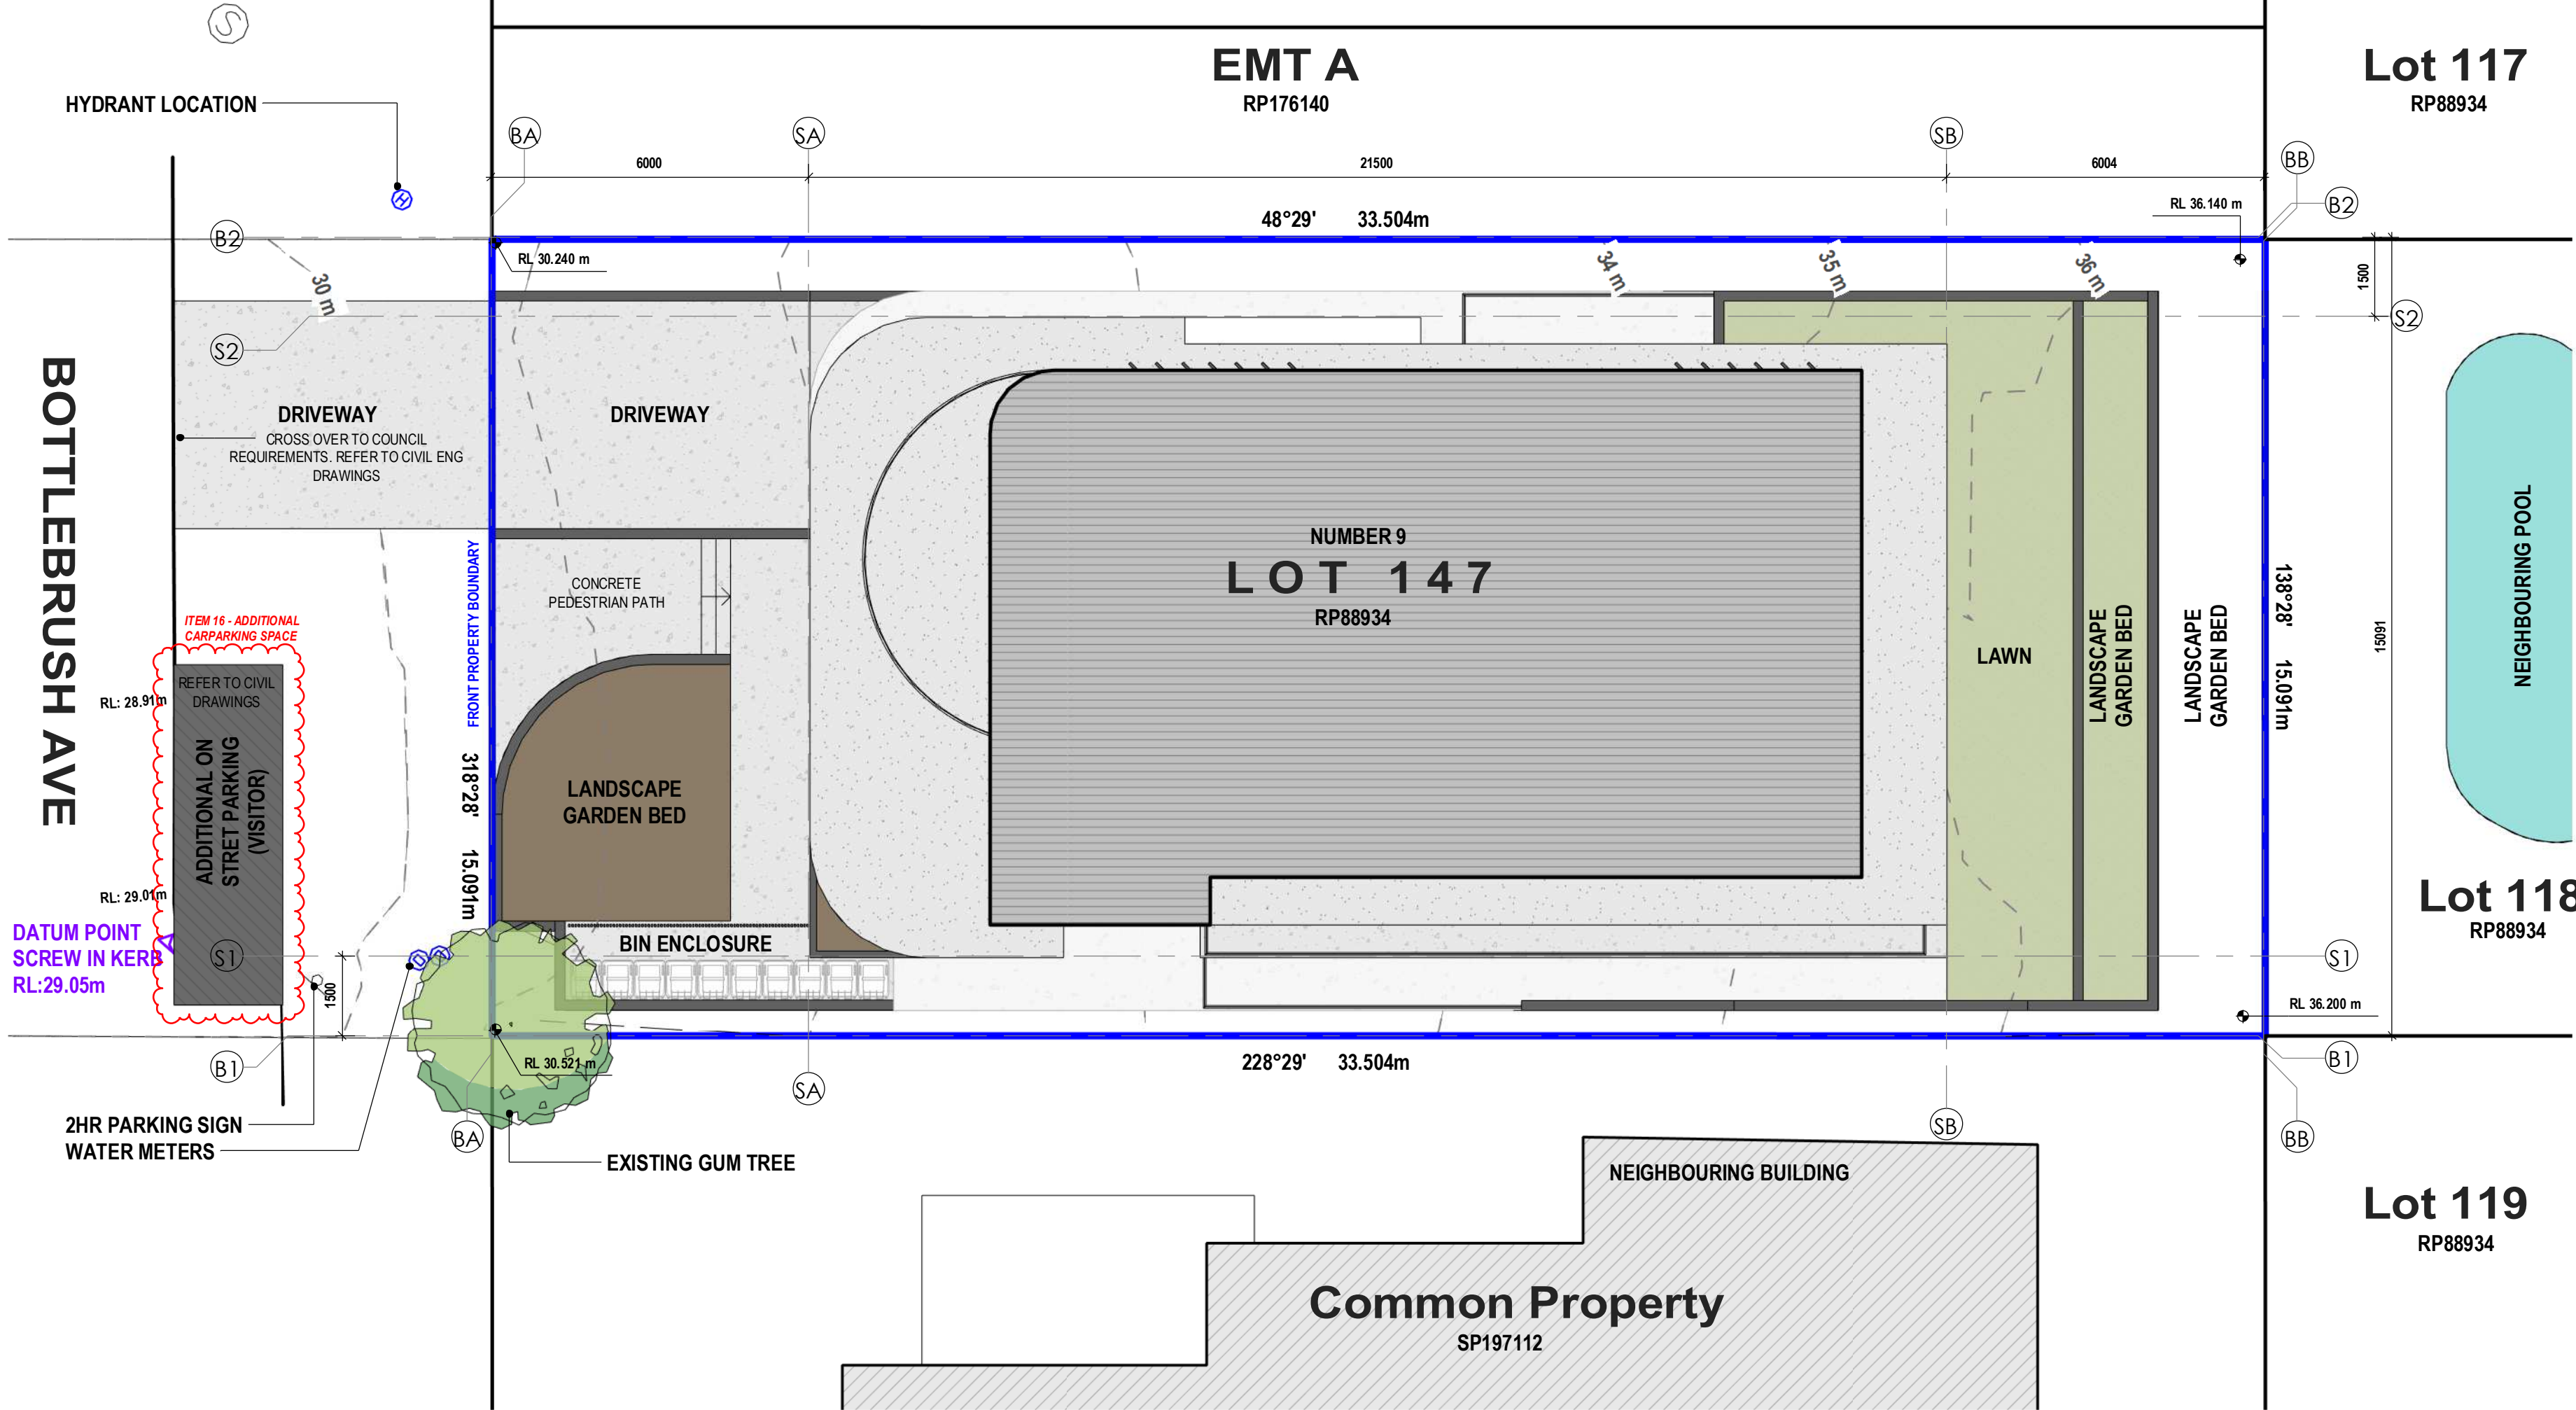

Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)  
  
ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**

Drawing Title  
**PROPOSED SITE PLAN**

**APPROVED PLAN**  
**MCU21/0133 & OPW21/0220**  
**NOOSA COUNCIL**  
**5 NOVEMBER 2021**

|       | B           | INFO REQUEST |
|-------|-------------|--------------|
| A     | DA Set      |              |
| Issue | Description |              |

24/09/2021  
13/07/2021  
Date

Project Number

**21007**

SCALE @A2



Sheet Number

**A.003**

Phase  
**DA**

Issue  
**B**





Scale 1 : 100

Scale 1 : 100



**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)

ABN: 37 601 151 508  
Q.B.C.C lic. No: 1307012

Client Name

**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**

Drawing Title

## BASEMENT LEVEL & LEVEL 1


|       |              |
|-------|--------------|
| B     | INFO REQUEST |
| A     | DA Set       |
| Issue | Description  |

24/09/2021  
13/07/2021  
Date

Project Number

21007

SCALE @A2



Sheet Number

# A.100


| Phase | Issue |
|-------|-------|
| DA    | B     |

Document Set ID: 21694501  
Version: 2, Version Date: 09/11/2021




## LEVEL 2

Scale 1:100

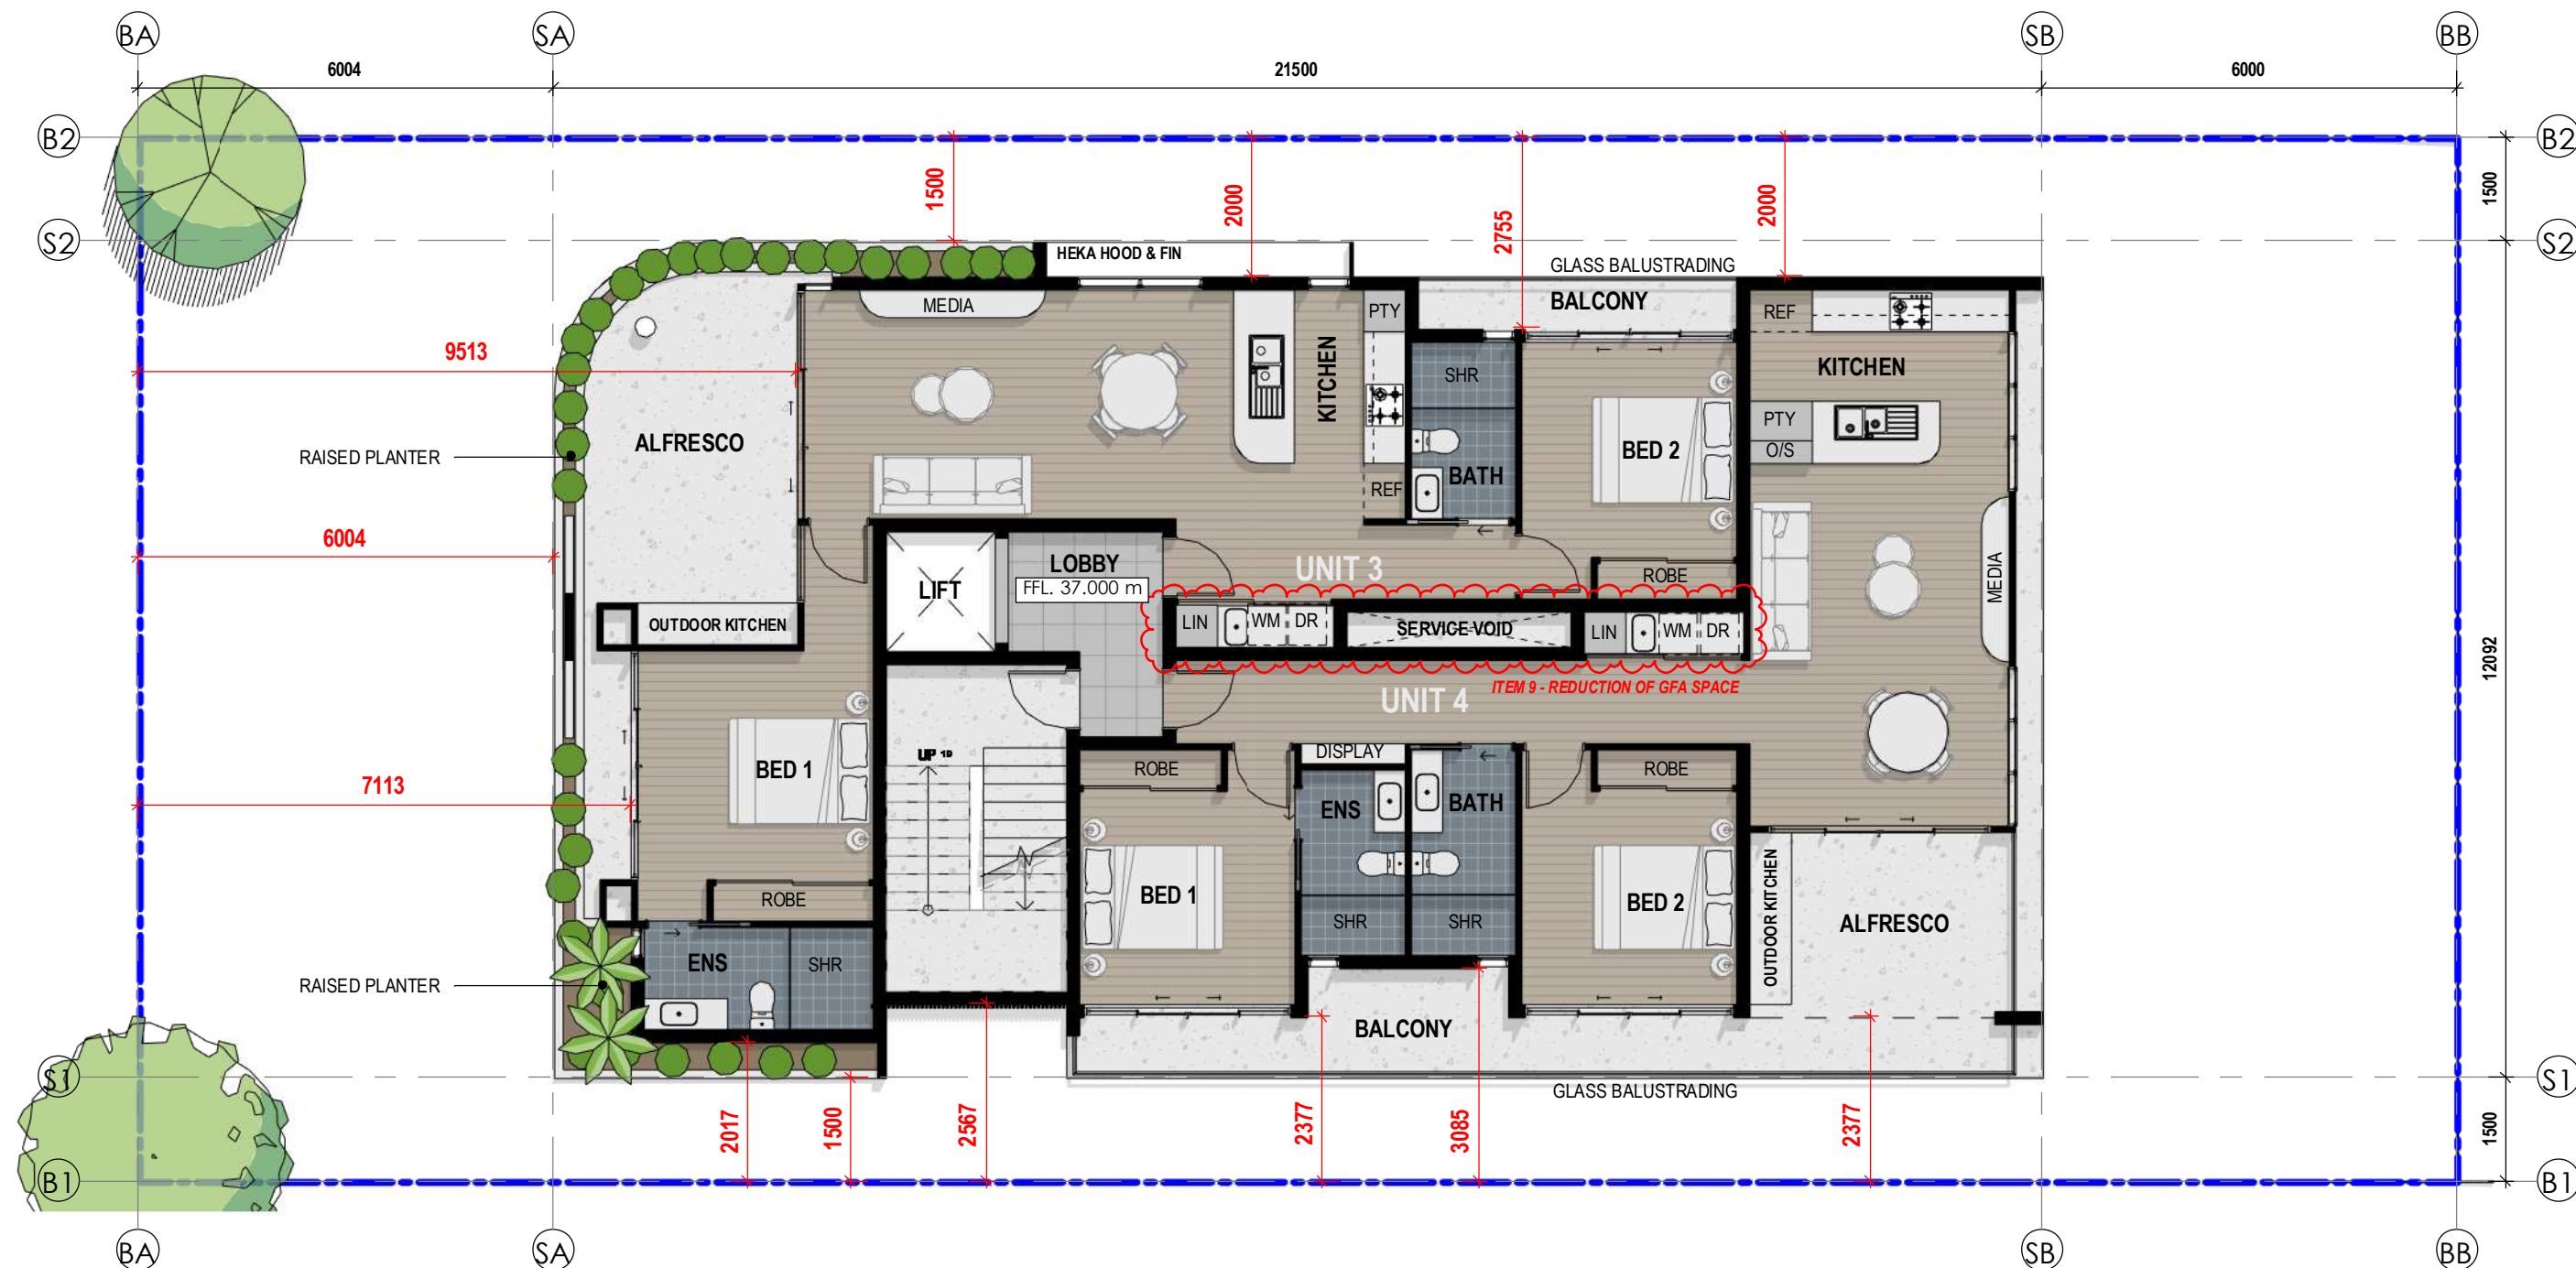

## LEVEL 3

Scale 1:100

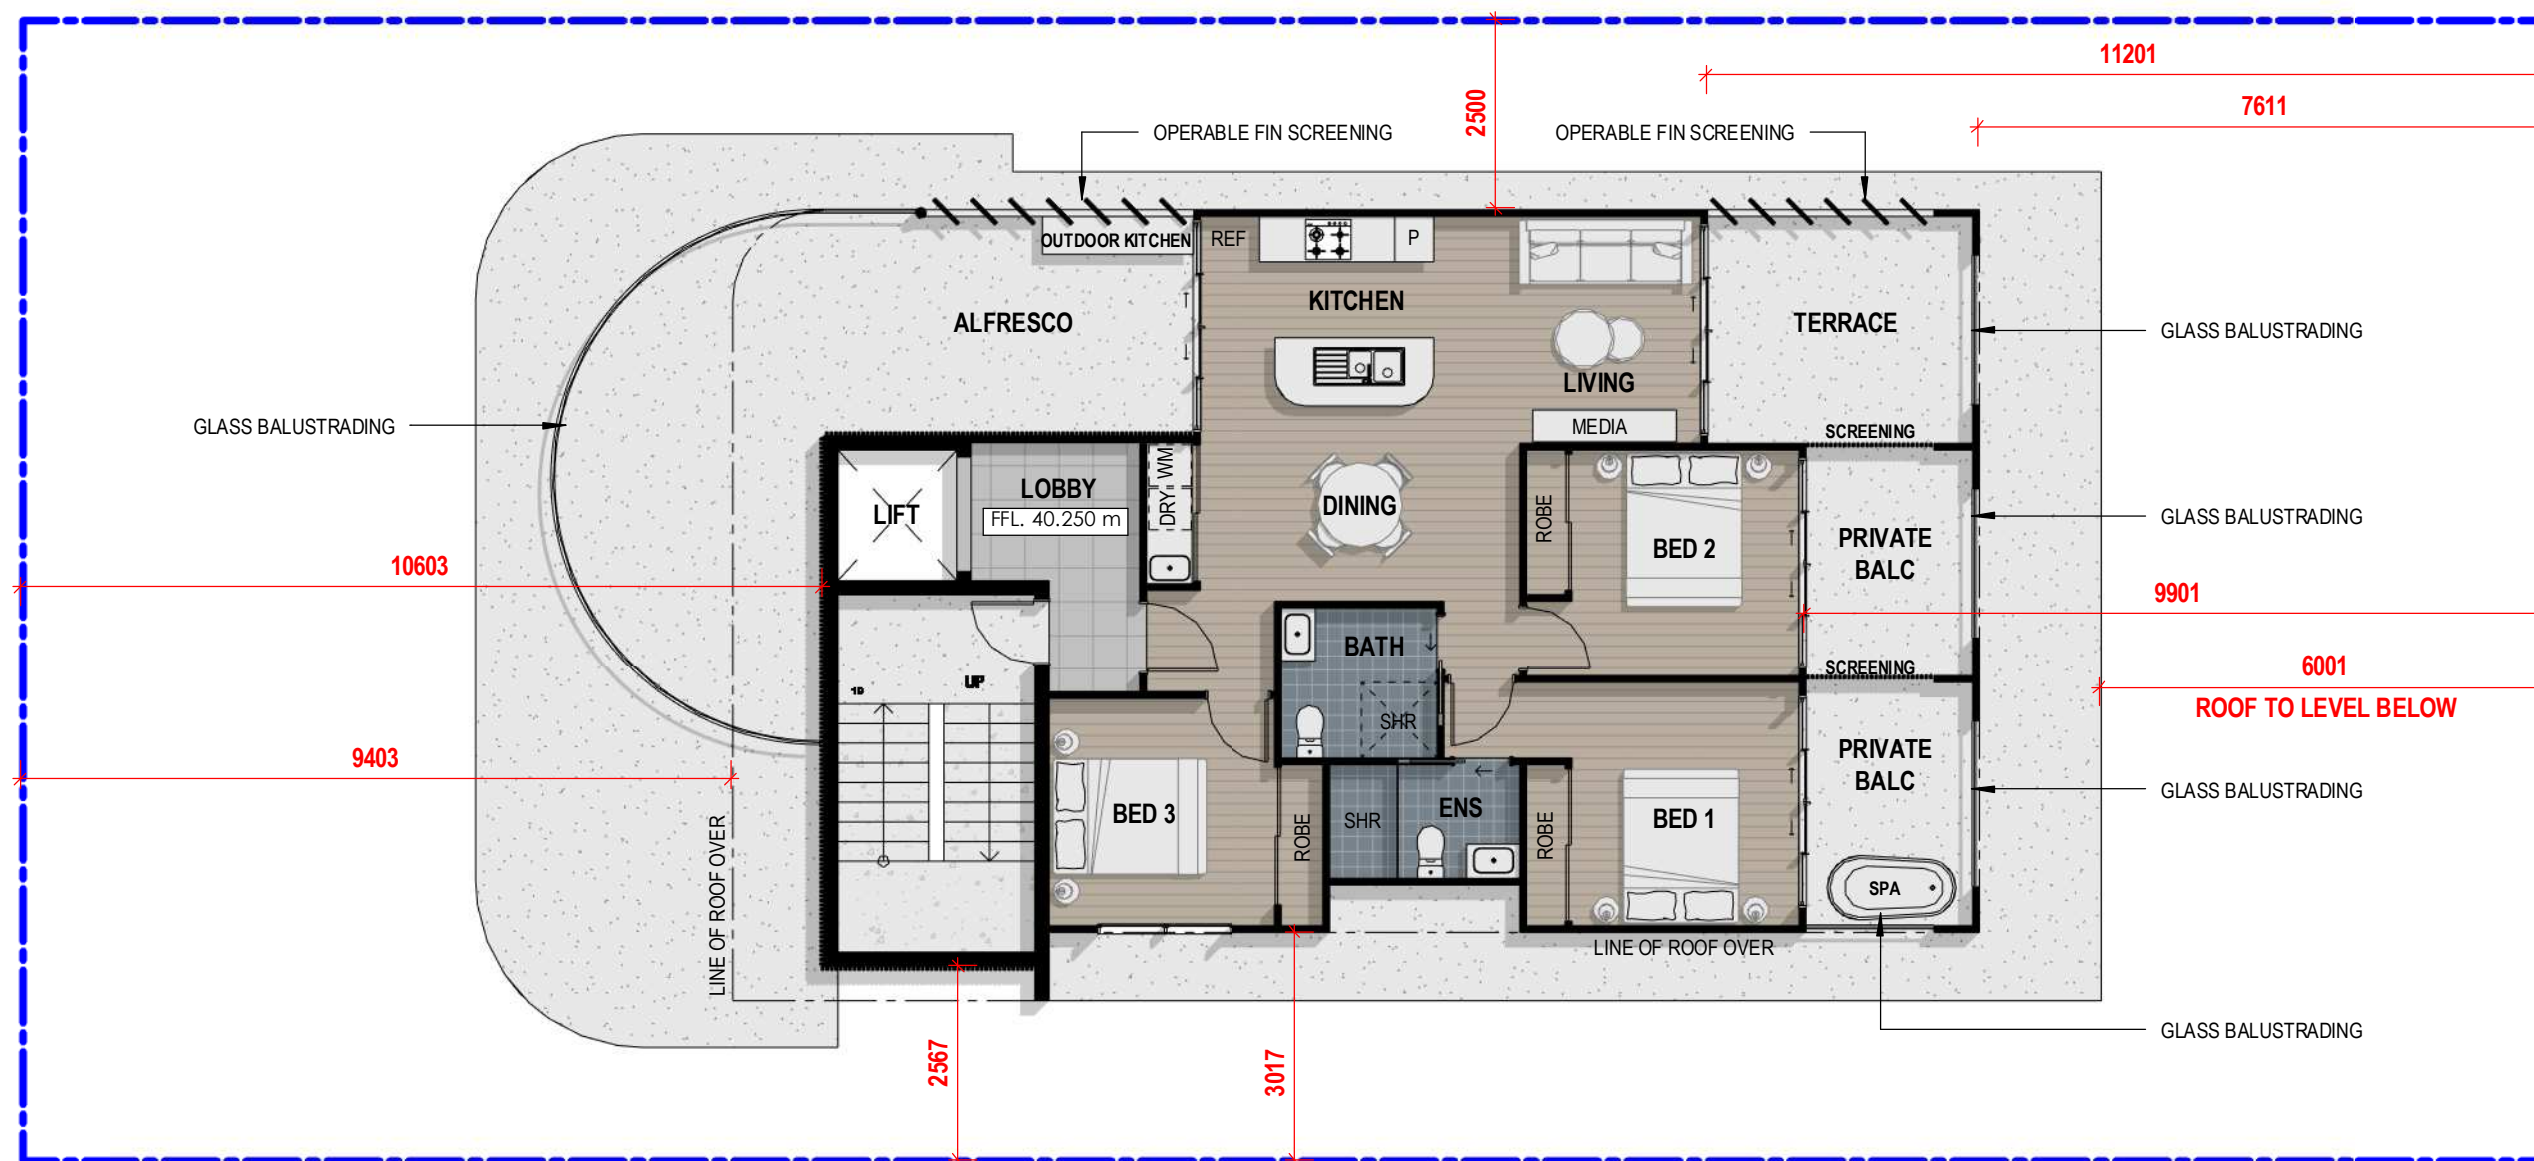

APPROVED PLAN  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021



Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)

ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**

Drawing Title  
**LEVEL 2 & LEVEL 3**


| B     | INFO REQUEST |
|-------|--------------|
| A     | DA Set       |
| Issue | Description  |

24/09/2021  
13/07/2021  
Date

Project Number  
**21007**

Sheet Number  
**A.102**

SCALE @A2



Phase  
DA  
Issue  
B



SITE CHARACTERISTICS

|              |                               |
|--------------|-------------------------------|
| Adress:      | 9 Bottlebrush Ave Noosa Heads |
| Lot Details: | LOT 147 on RP88934            |
| Site Area:   | 506m <sup>2</sup>             |
| Zoning:      | High Density Residential      |
| Height:      | 12m                           |
| Authority:   | Noosa Regional Council        |

DEVELOPMENT STATISTICS

|                                    |    |
|------------------------------------|----|
| Dwellings & Density Ratio (0.75.1) |    |
| 2 bed units                        | 4  |
| 3 bed units                        | 1  |
| Total Bedrooms                     | 11 |
| Total Dwellings                    | 5  |

Car Parking

|                             |   |
|-----------------------------|---|
| Unit Parking                | 6 |
| Visitors (dwellings x 0.25) | 1 |
| Total Parking Required      | 7 |
| Total Parking Provided      | 7 |

GFA Areas

Plot Ratio Allowable

(ratio of at least three small dwellings to one other dwelling)

506m<sup>2</sup> x 0.75 = 379.5m<sup>2</sup> GFA maximum

|                      |                   |
|----------------------|-------------------|
| LEVEL 1 (UNIT 1 & 2) |                   |
| Internal GFA         | 152m <sup>2</sup> |
| LEVEL 2 (UNIT 3 & 4) |                   |
| Internal GFA         | 148m <sup>2</sup> |
| LEVEL 3 (UNIT 5)     |                   |
| Internal GFA         | 78m <sup>2</sup>  |

Total GFA areas \* 378m<sup>2</sup>

\*excludes terraces, carparking and storage areas

Site Coverage

Maximum = 45%

506m<sup>2</sup> x 0.45 = 228m<sup>2</sup> site cover maximum


Total Site Cover Provided = 228m<sup>2</sup>

35% Landscape Required


(ratio of at least three small dwellings to one other dwelling)

Landscape Required 506m<sup>2</sup> x 0.35 177.1mm<sup>2</sup>

Total Landscape Provided: 181m<sup>2</sup>

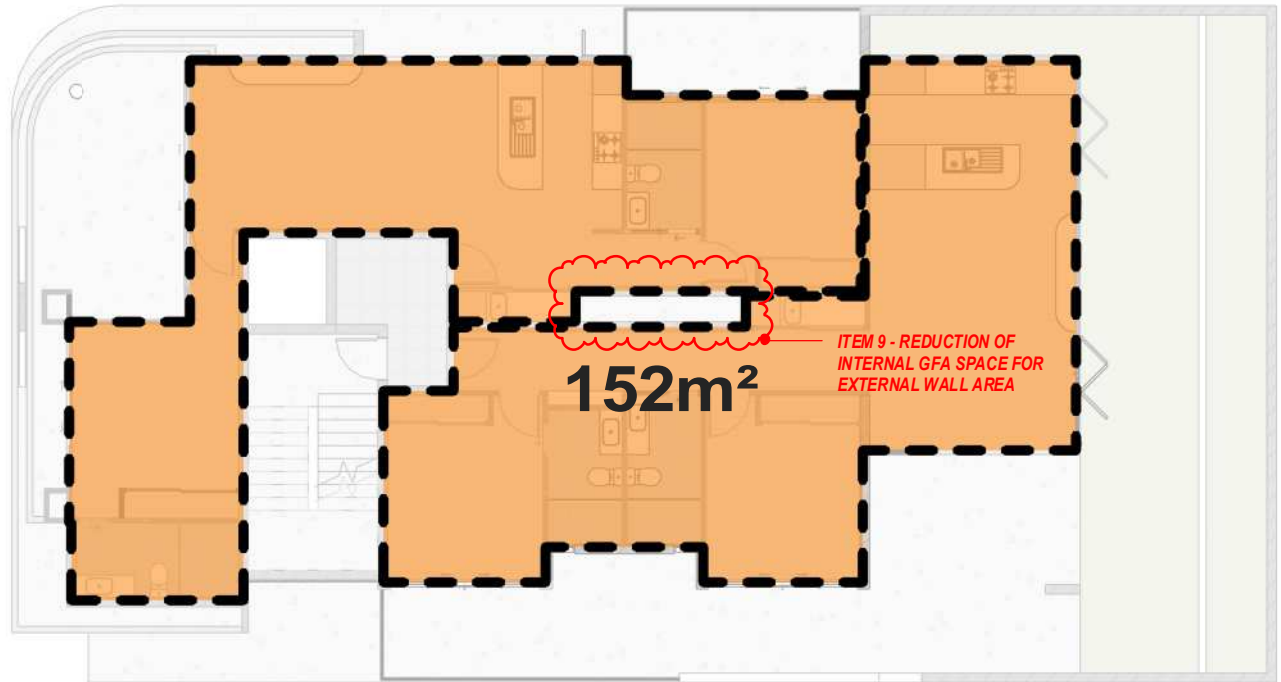


Plan  
LEVEL 1 - GFA 1 : 150

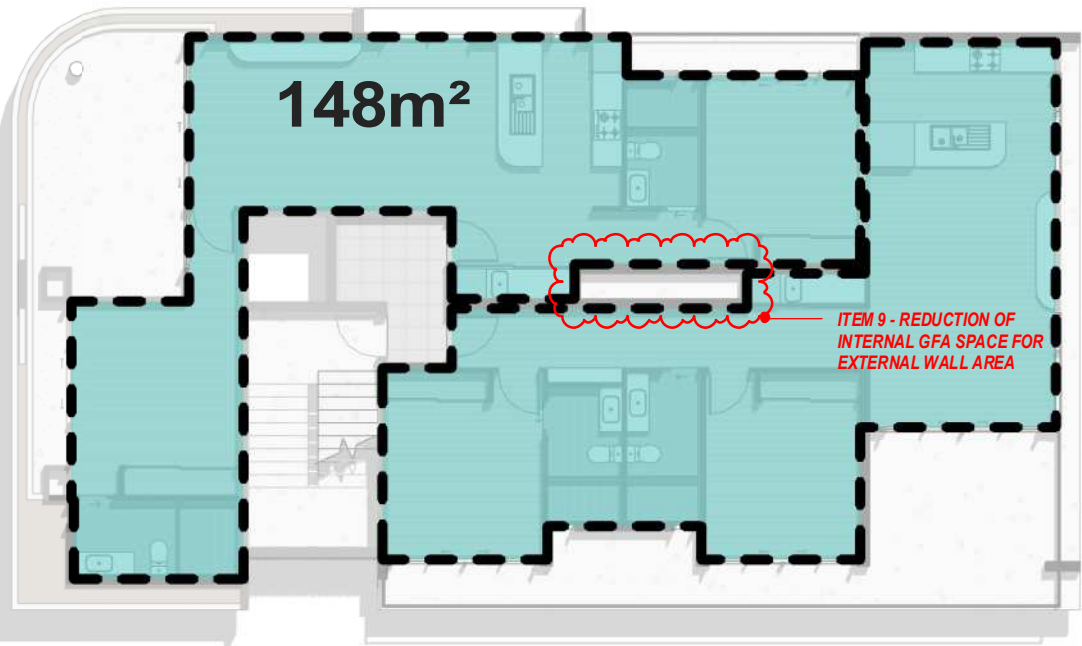


Plan  
LEVEL 2 - GFA 1 : 150



Plan  
LEVEL 3 - GFA 1 : 150

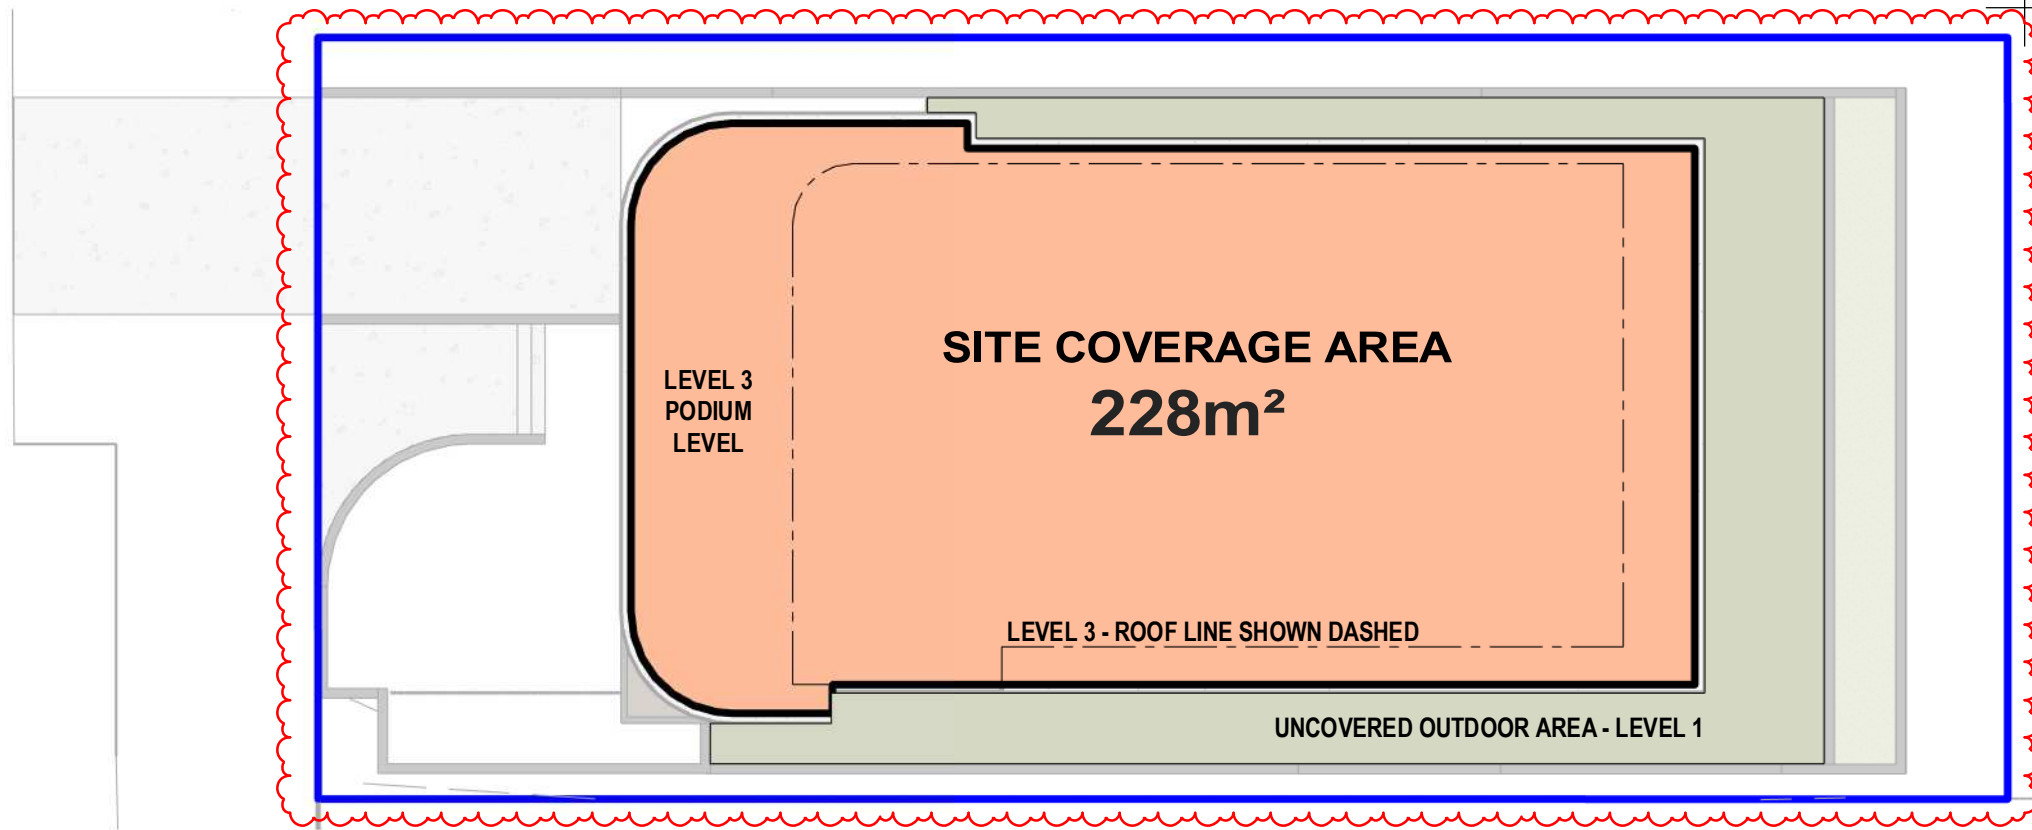

Plan  
SITE COVER PLAN 1 : 150

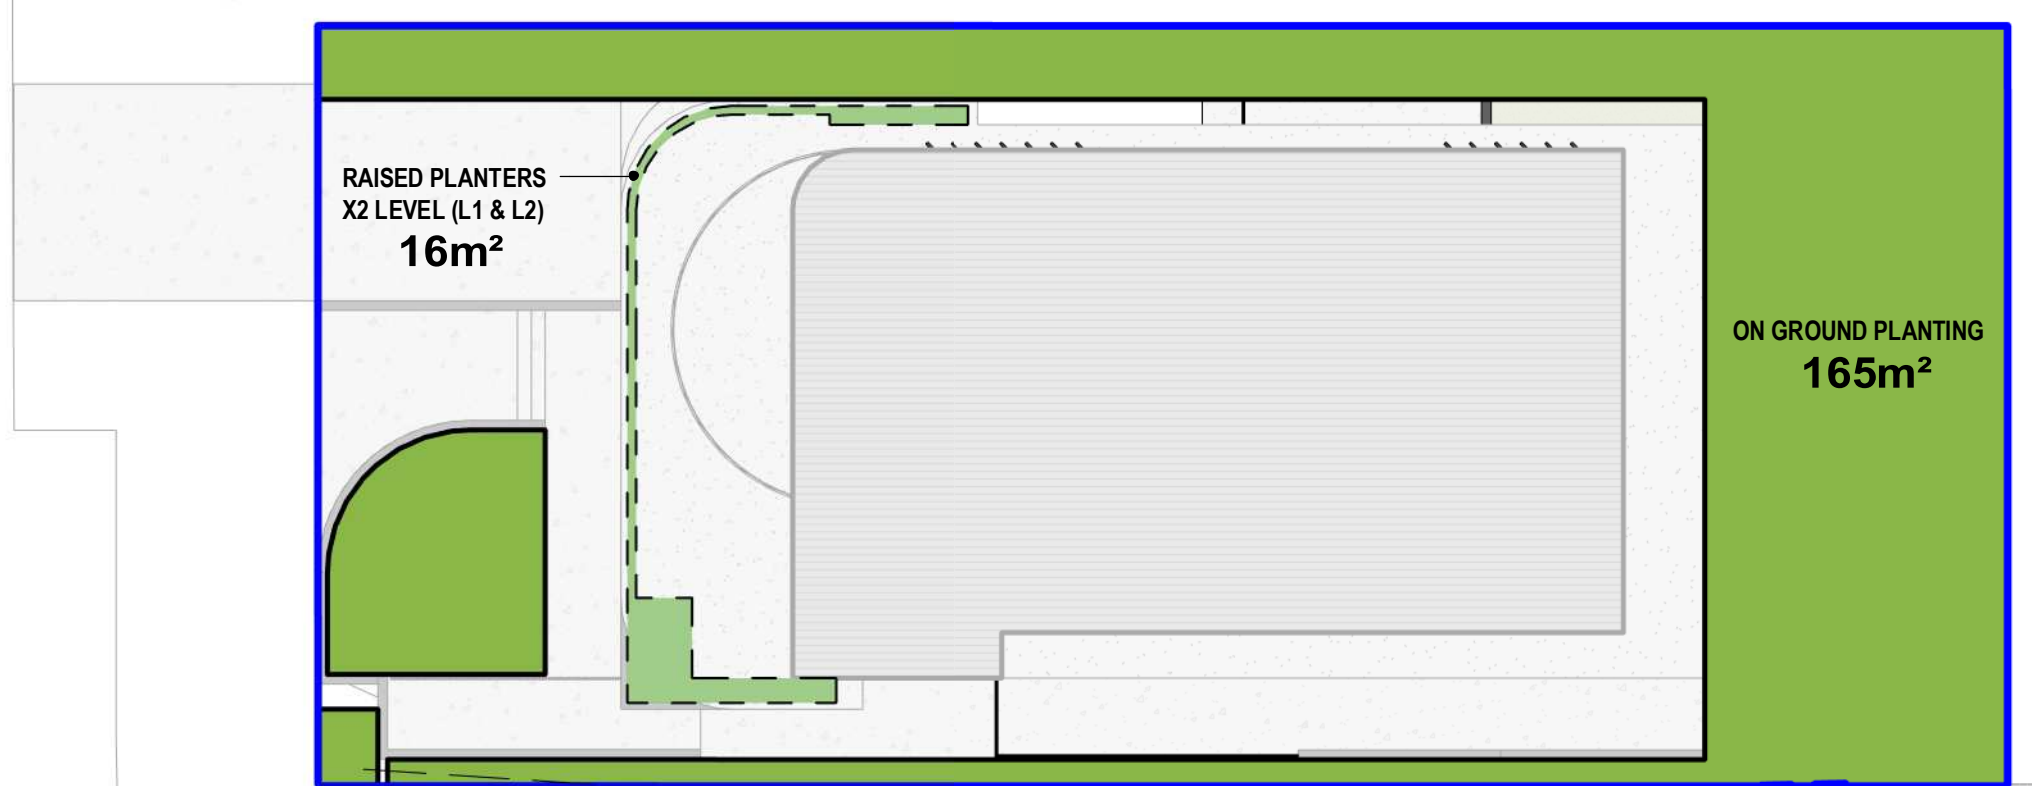

Plan  
LANDSCAPE COVER PLAN 1 : 150

APPROVED PLAN  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021



Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)

ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**


Drawing Title  
**DEVELOPMENT SUMMARY**

|       |              |
|-------|--------------|
| B     | INFO REQUEST |
| A     | DA Set       |
| Issue | Description  |

|            |
|------------|
| 24/09/2021 |
| 13/07/2021 |
| Date       |

Project Number  
**21007**

SCALE @A2




Sheet Number

**A.103**

Phase  
DA

Issue  
B



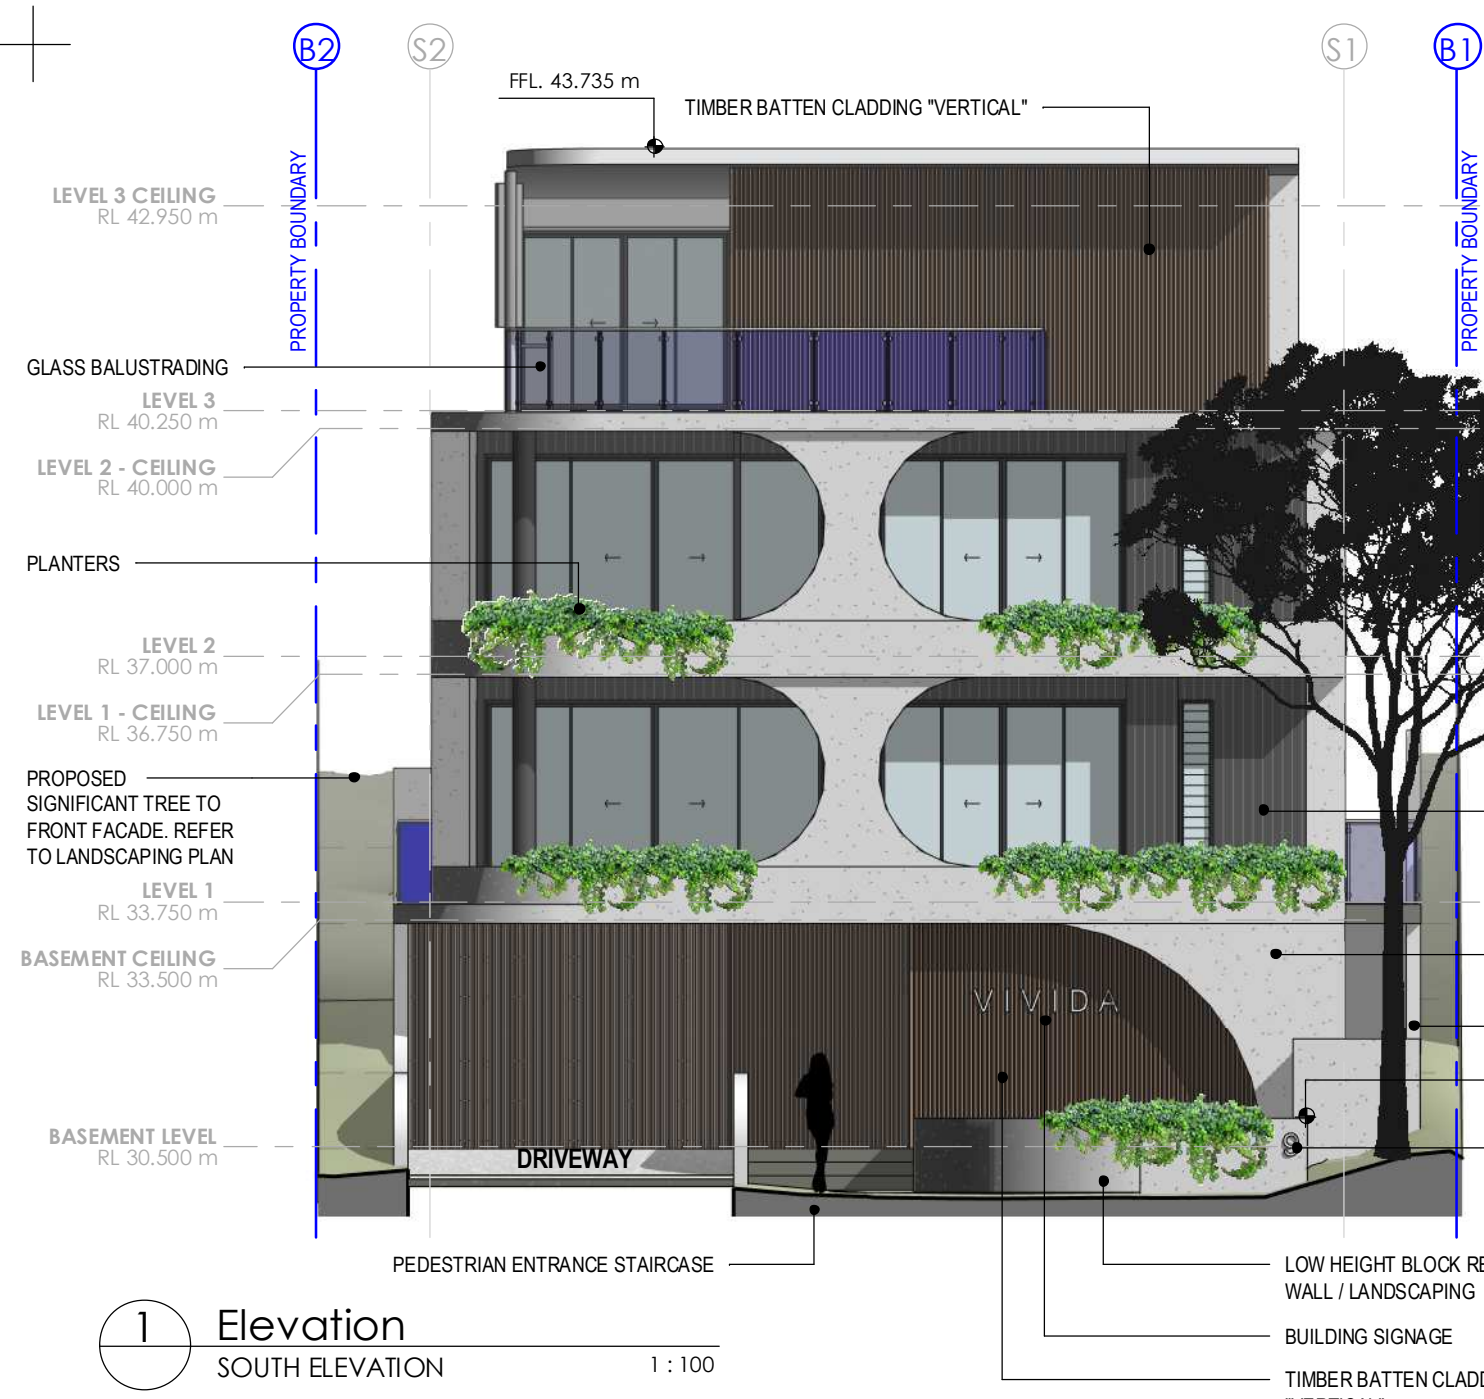

Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 11A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)

ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**

Drawing Title  
**ELEVATIONS**

**APPROVED PLAN**  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

|       |              |            |
|-------|--------------|------------|
| B     | INFO REQUEST | 24/09/2021 |
| A     | DA Set       | 13/07/2021 |
| Issue | Description  | Date       |

Project Number  
**21007**

SCALE @A2  
0 0.5m 1m 2m  
1:50



Sheet Number  
**A.200**

Phase  
DA

Issue  
B



APPROVED PLAN  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

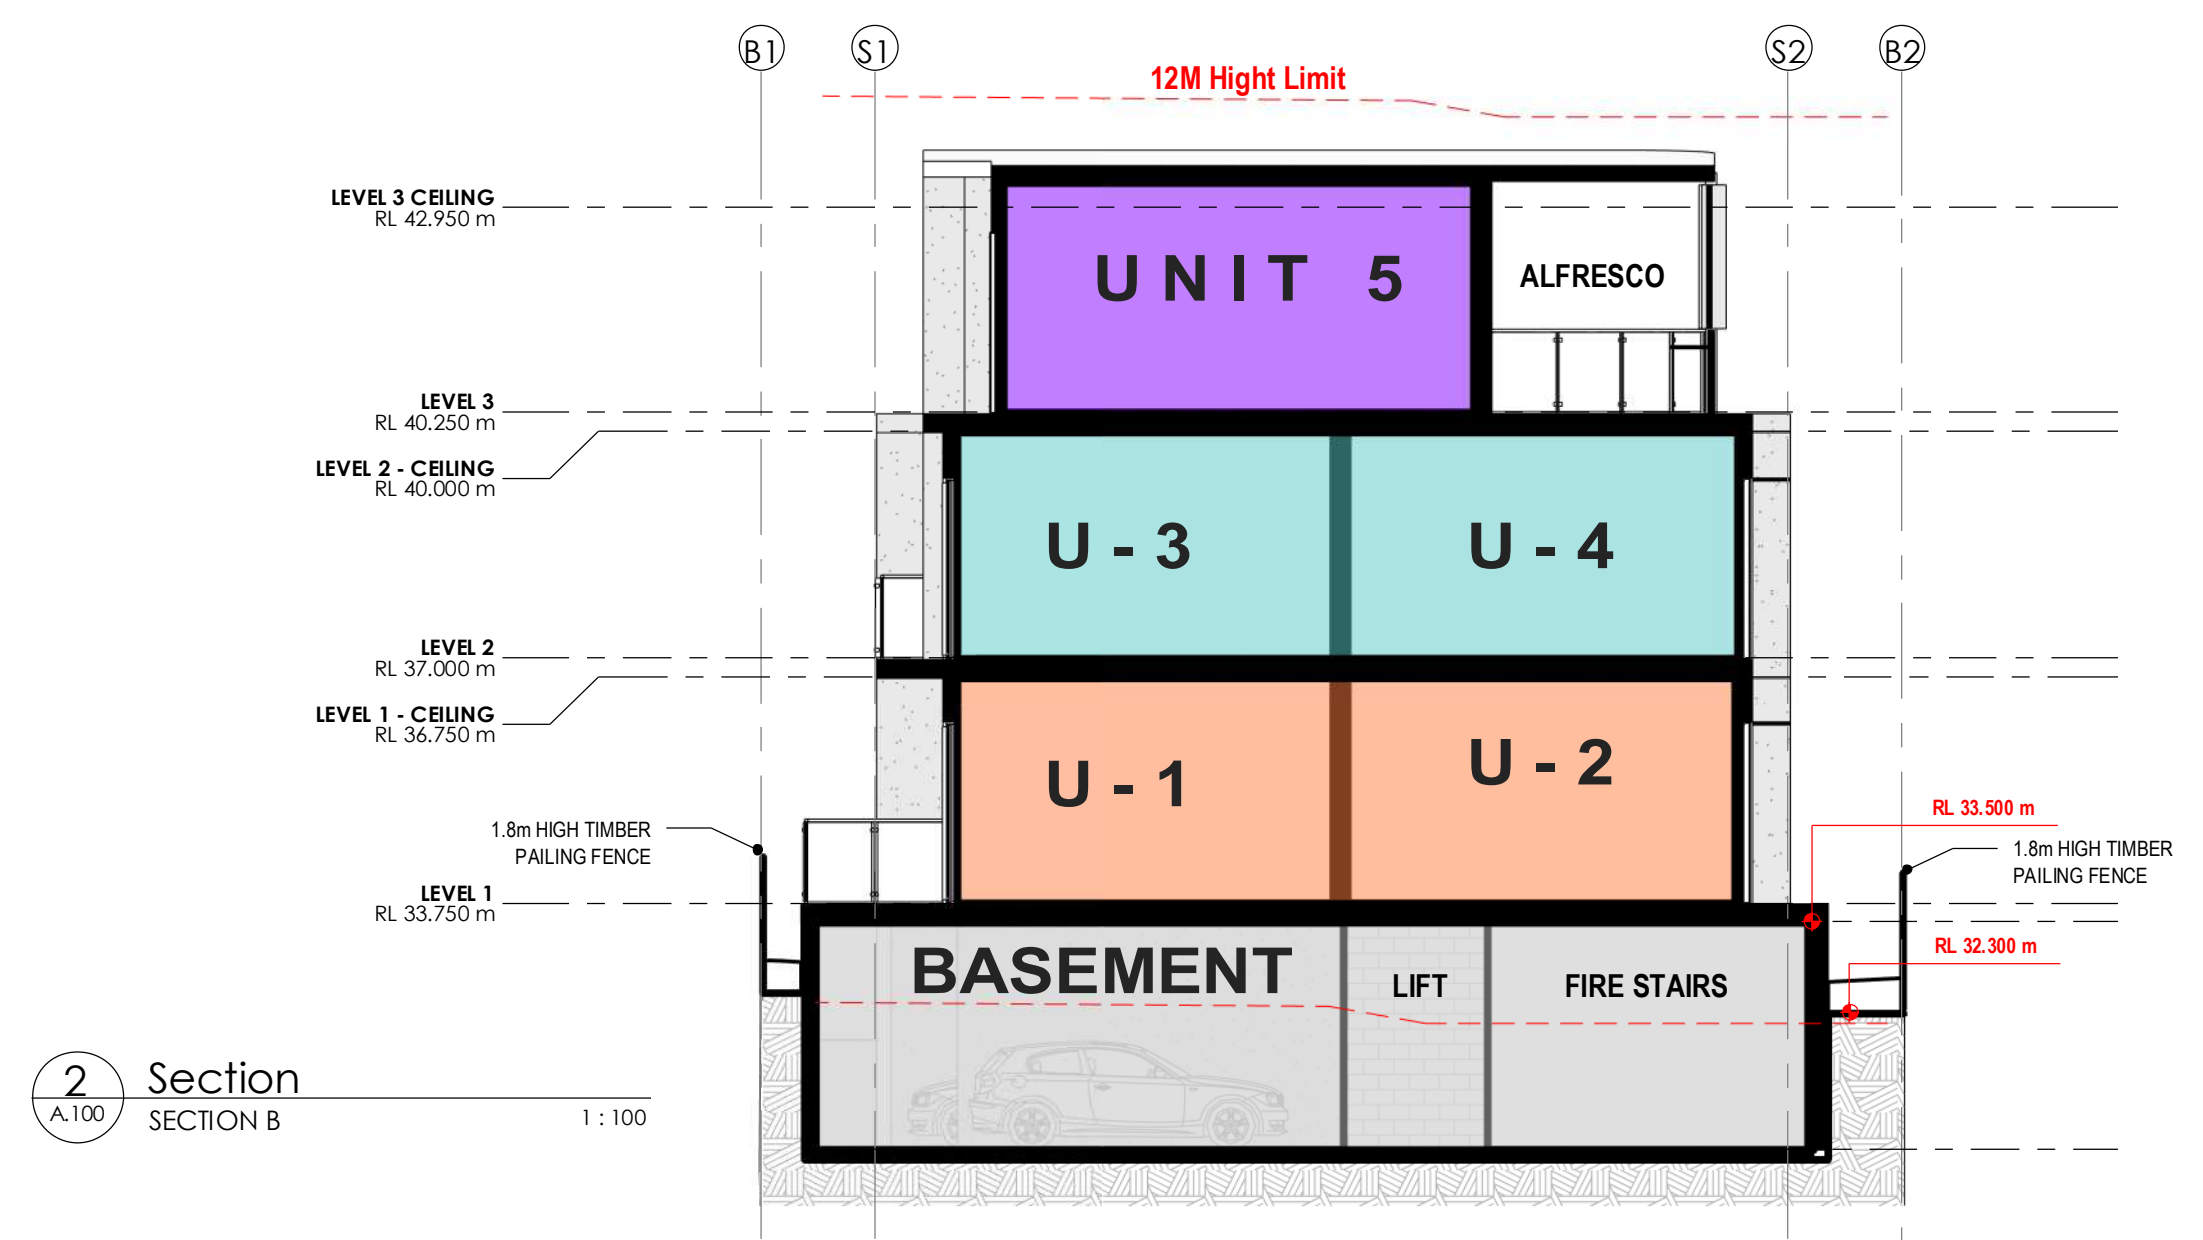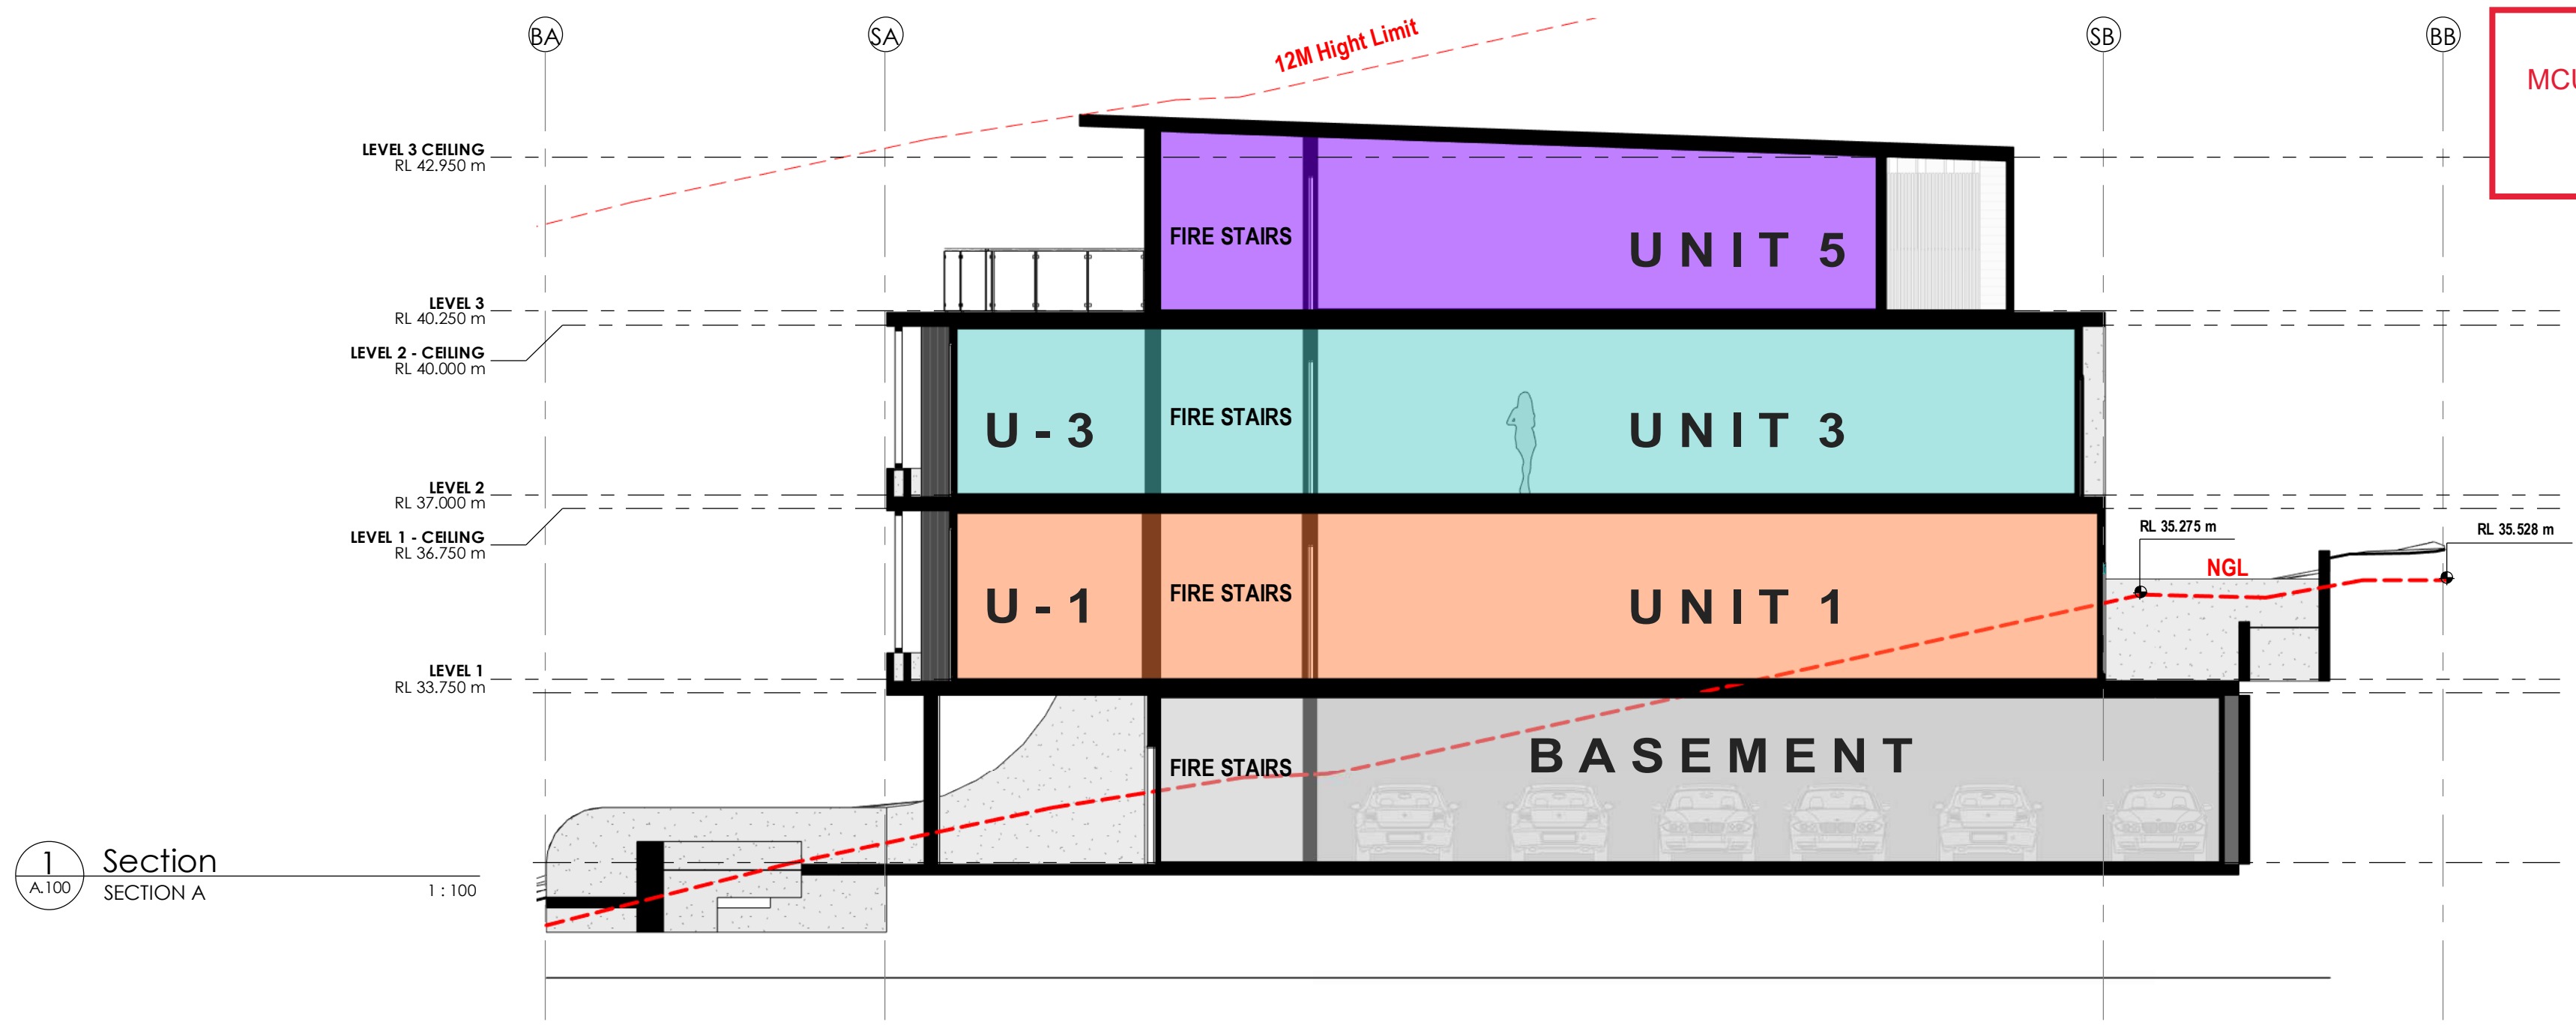

Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)

ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**


Drawing Title  
**SITE SECTIONS**

| A     | DA Set | Description |
|-------|--------|-------------|
| Issue |        |             |

13/07/2021  
Date

Project Number  
**21007**

SCALE @ A2  
1:50



Sheet Number  
**A.201**

|       |       |
|-------|-------|
| Phase | Issue |
| DA    | A     |



APPROVED PLAN  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021



**TIMBER BATTENS**  
SPOTTED GUM LOOK TIMBER BATTENS



**EXTERIOR FINISH**  
WHITE RENDER FINISH TO MASONARY WALLS



**PLANTERS**  
LUSH HANGING PLANTS TO FORMED PLANTER BOXES



**CLADDING**  
SCYON AXON 133mm CLADDING PAINTED "MONUMENT"



**HOODS**  
STEEL HEKA HOODS AND FINS "BLACK"



**CLADDING**  
SCYON LINEA WEATHERBOARD CLADDING PAINTED "LEXICON HALF"



Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

**ZEST DESIGN STUDIO**  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | [ian@zestbuildingdesign.com.au](mailto:ian@zestbuildingdesign.com.au)  
W | [www.zestbuildingdesign.com.au](http://www.zestbuildingdesign.com.au)  
ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**ICB**

Drawing Title  
**EXTERNAL FINISHES**

| A     | DA Set | Description |
|-------|--------|-------------|
| Issue |        |             |

13/07/2021  
Date

Project Number  
**21007**

SCALE @A2



Sheet Number  
**A.302**

Phase  
**DA**

Issue  
**A**



Landscape Legend



MULCH  
Hoop Pine Mulch

STONE  
Glacial Boulder



TURF  
Sir Walter - Tifluff  
Hybrid Bermuda



CG  
CASUARINA GLAUCA

SY  
SYZIGIUM AUSTRALE 'SELECT'



HEA  
XANTHORRHOEA JOHNSONII  
(HEATH GRASS TREE)

PIT  
HEDERA HELIX  
(PITTSBURGH IVY)




PAND  
PANDANUS ECTORIUS

EUC  
EUCALYPTUS  
(EXISTING)



CAB  
LIVISTONA AUSTRALIS  
(CABBAGE-TREE PALM)


BOTTLEBRUSH AVE

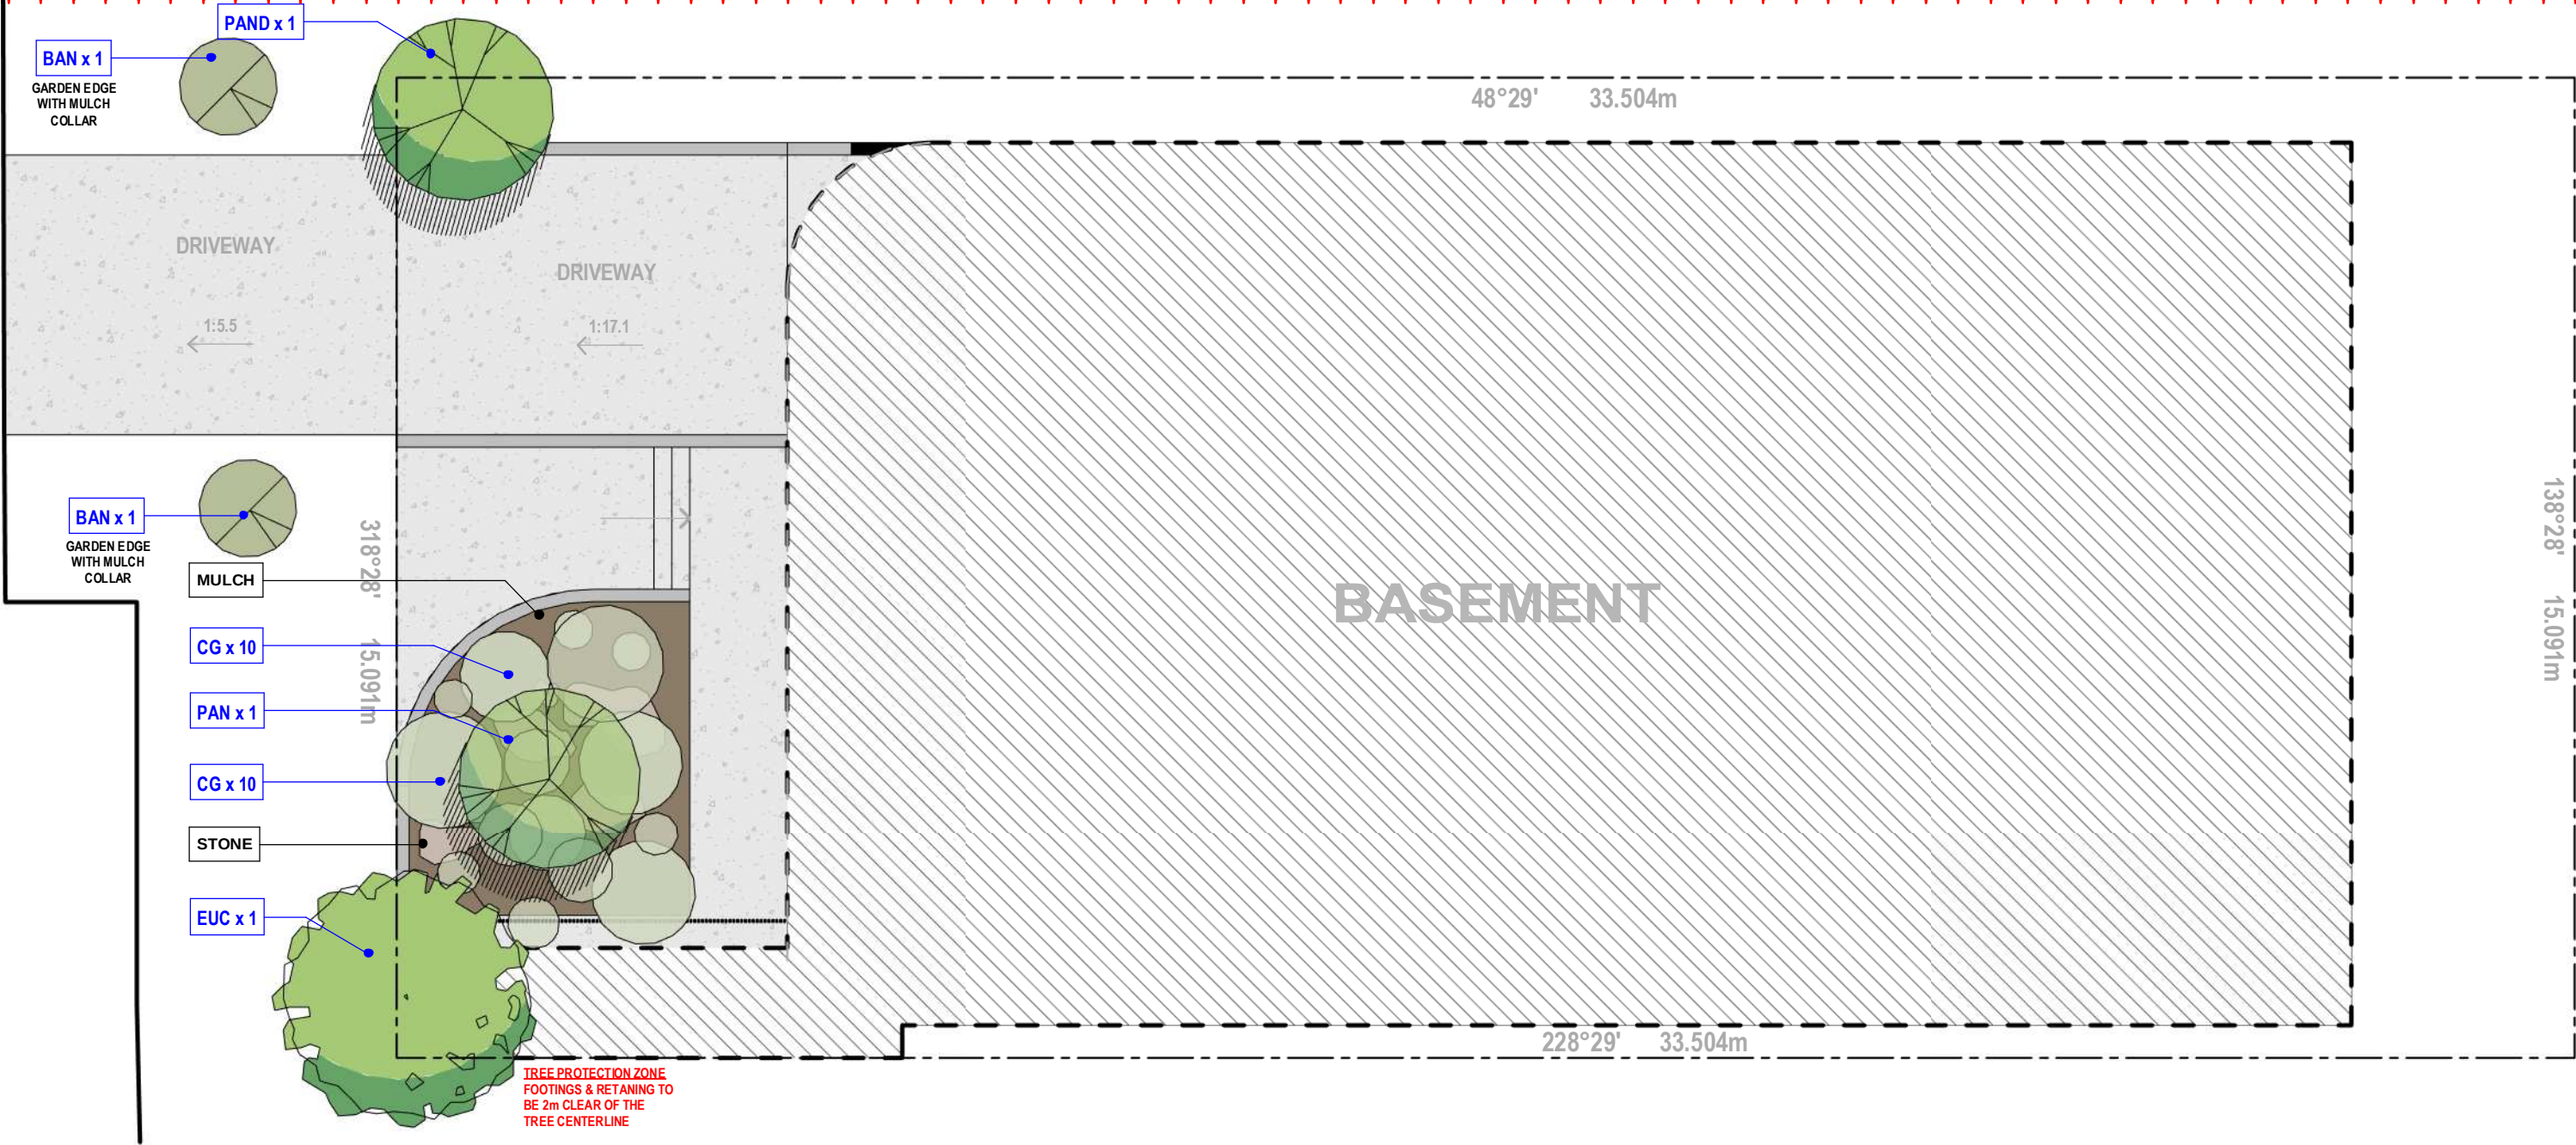

Plan  
BASEMENT LANDSCAPE PLAN 1 : 100

APPROVED PLAN  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

Plan  
LEVEL 1 LANDSCAPE PLAN 1 : 100

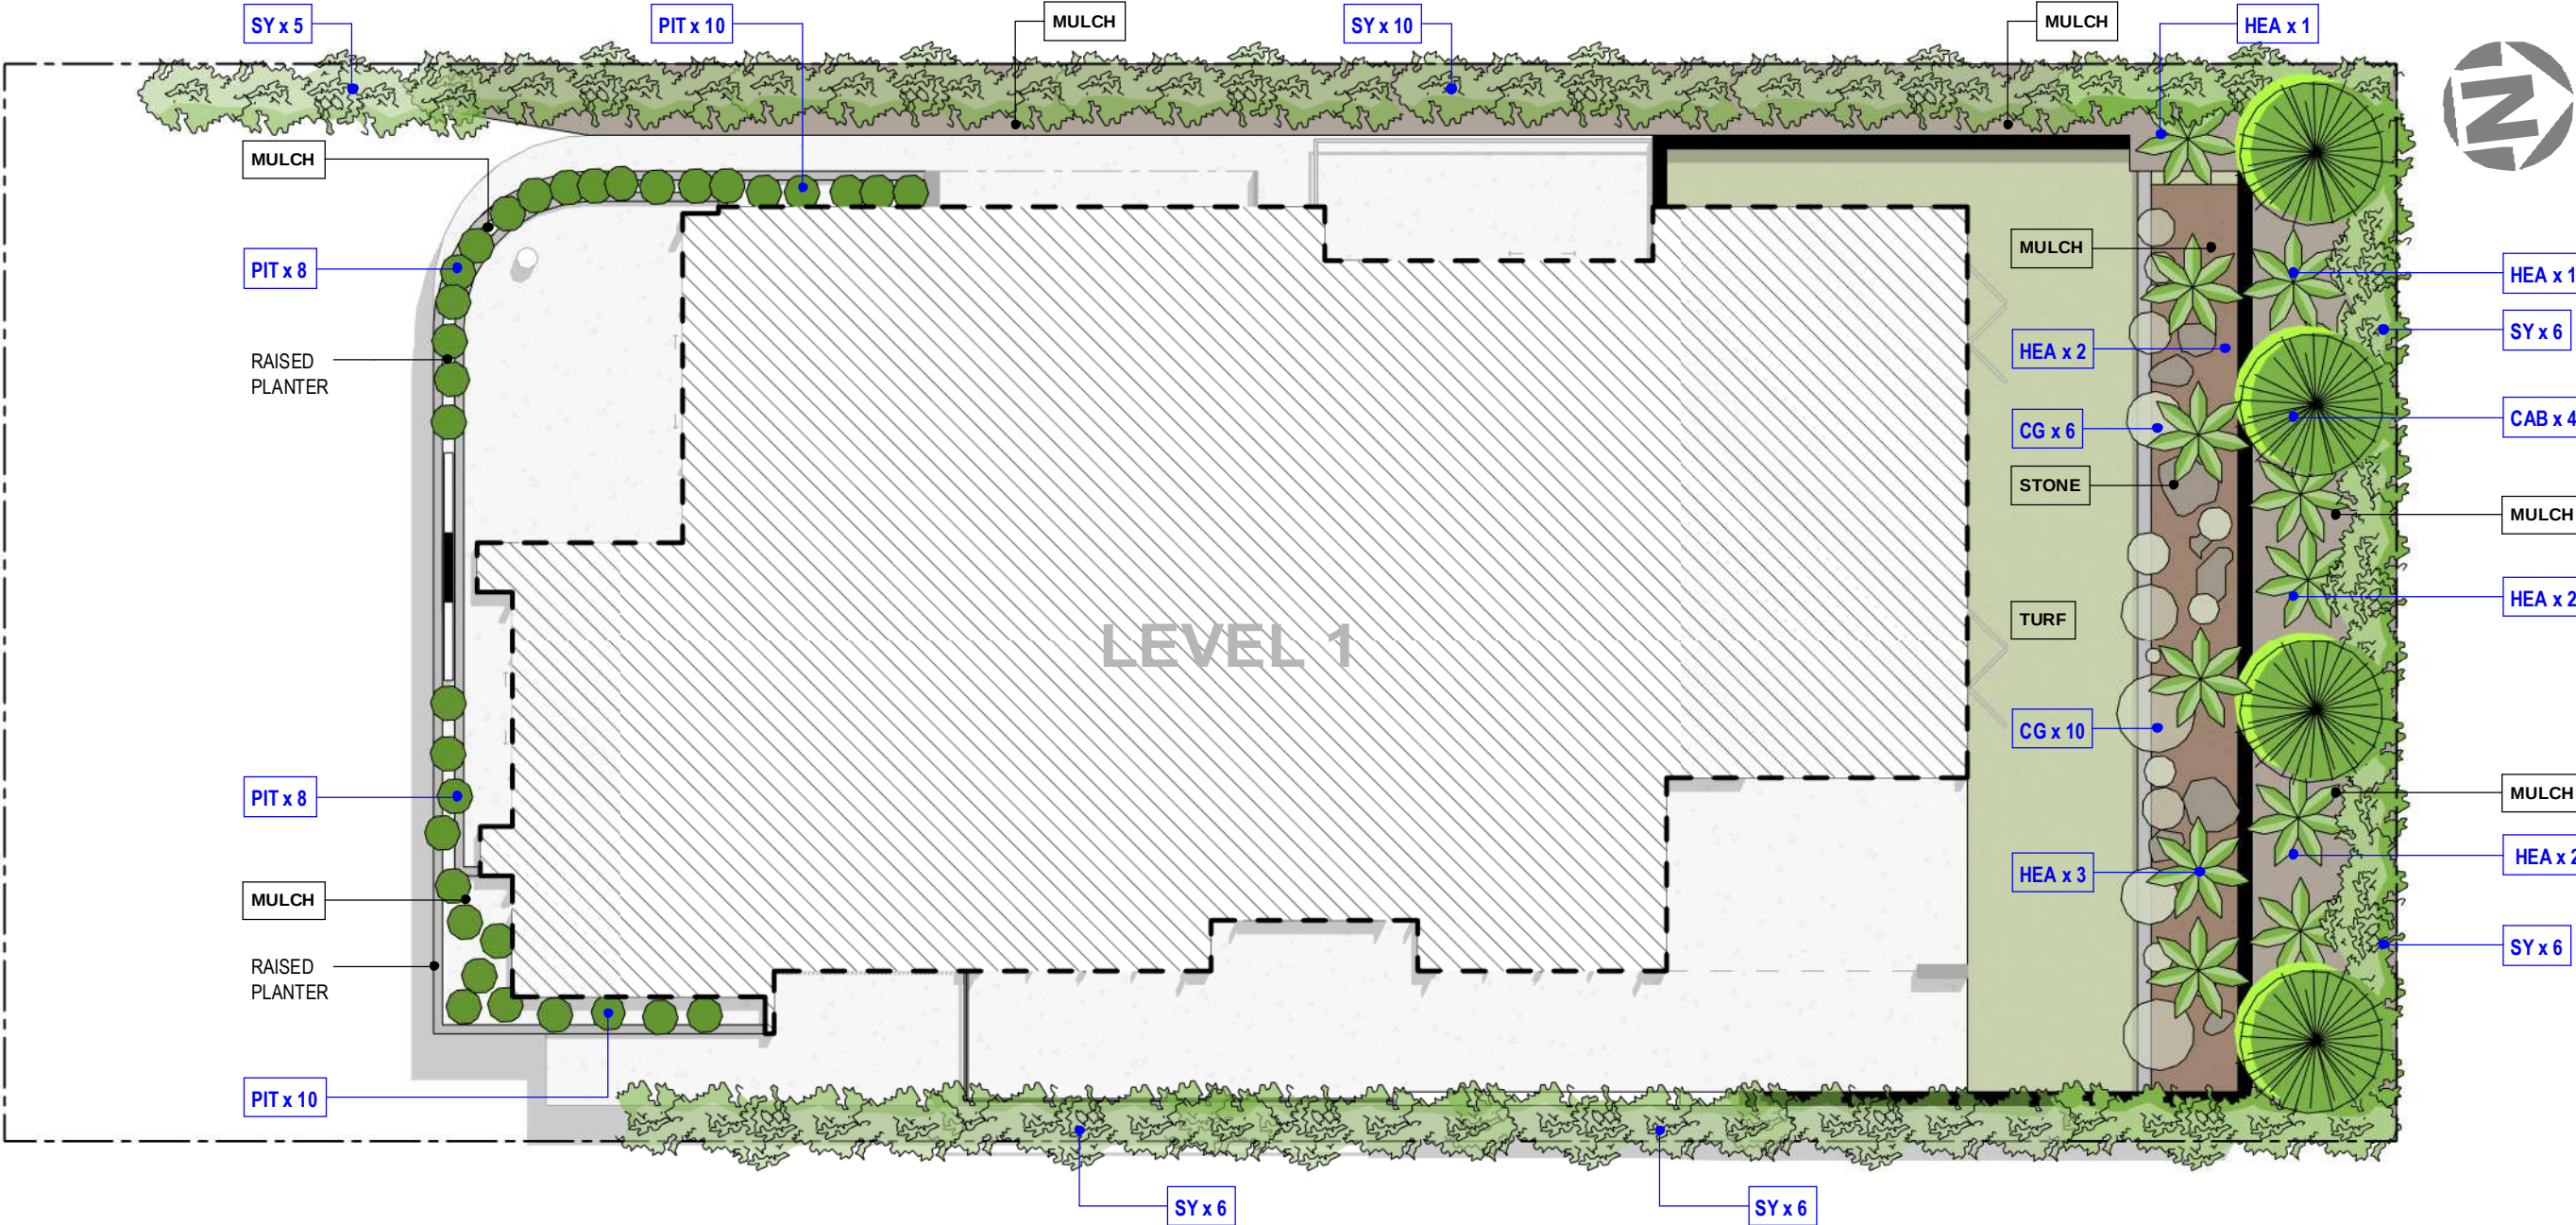

Project Address  
**9 BOTTLEBRUSH AVE  
NOOSA HEADS 4567**

ZEST DESIGN STUDIO  
P | 0457 314 346  
A | 1A/12 Action St, Noosaville, QLD 4566  
E | info@zestbuildingdesign.com.au  
W | www.zestbuildingdesign.com.au

ABN: 37 601 151 508  
Q.B.C.C. Lic. No: 1307012

Client Name  
**NOVATO GROUP**

Designer (s)  
**ICB**

Drawn by  
**TW**

Drawing Title  
**LANDSCAPE PLAN**

C INFO REQUEST  
B AMENDED LANDSCAPE PLAN  
A DA Set  
Issue Description

24/09/2021  
17/08/2021  
13/07/2021  
Date

Project Number  
**21007**

Sheet Number


**L.100**

SCALE @A2  
1:100


Phase  
DA

Issue  
C




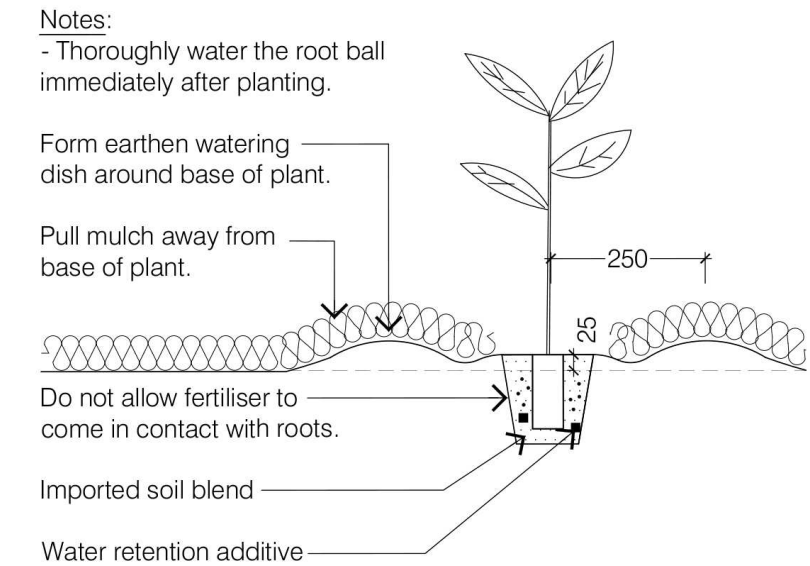

1 PLANTING DETAIL: TUBESTOCK

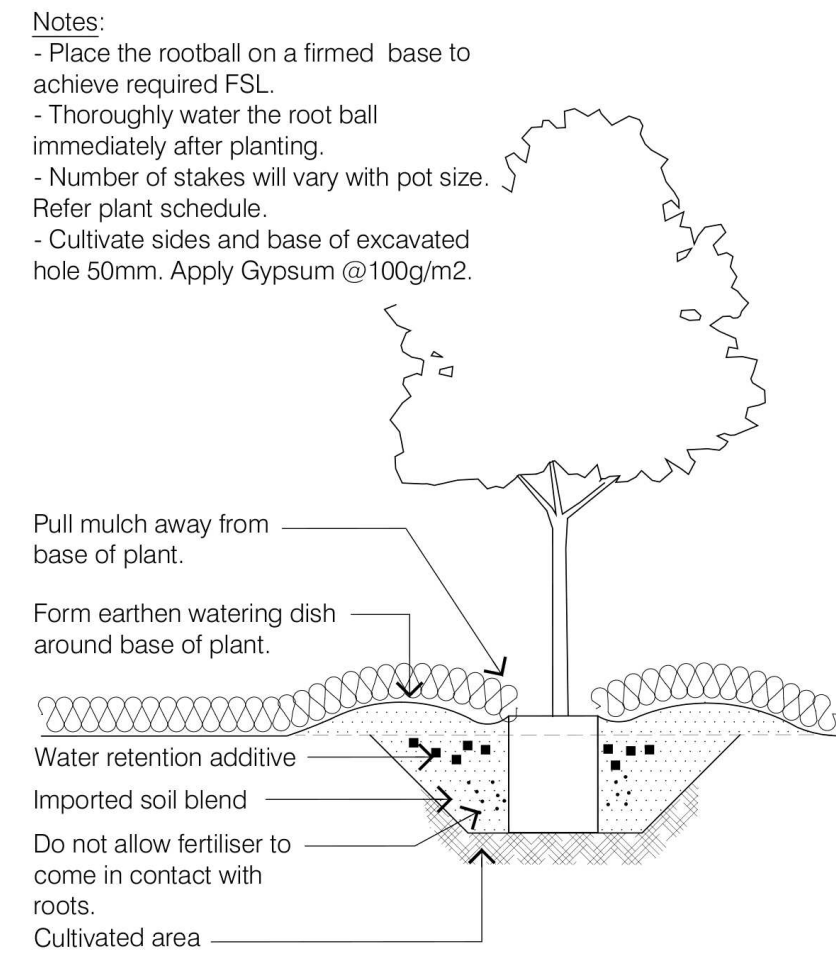


2 PLANTING DETAIL: 140-300mm

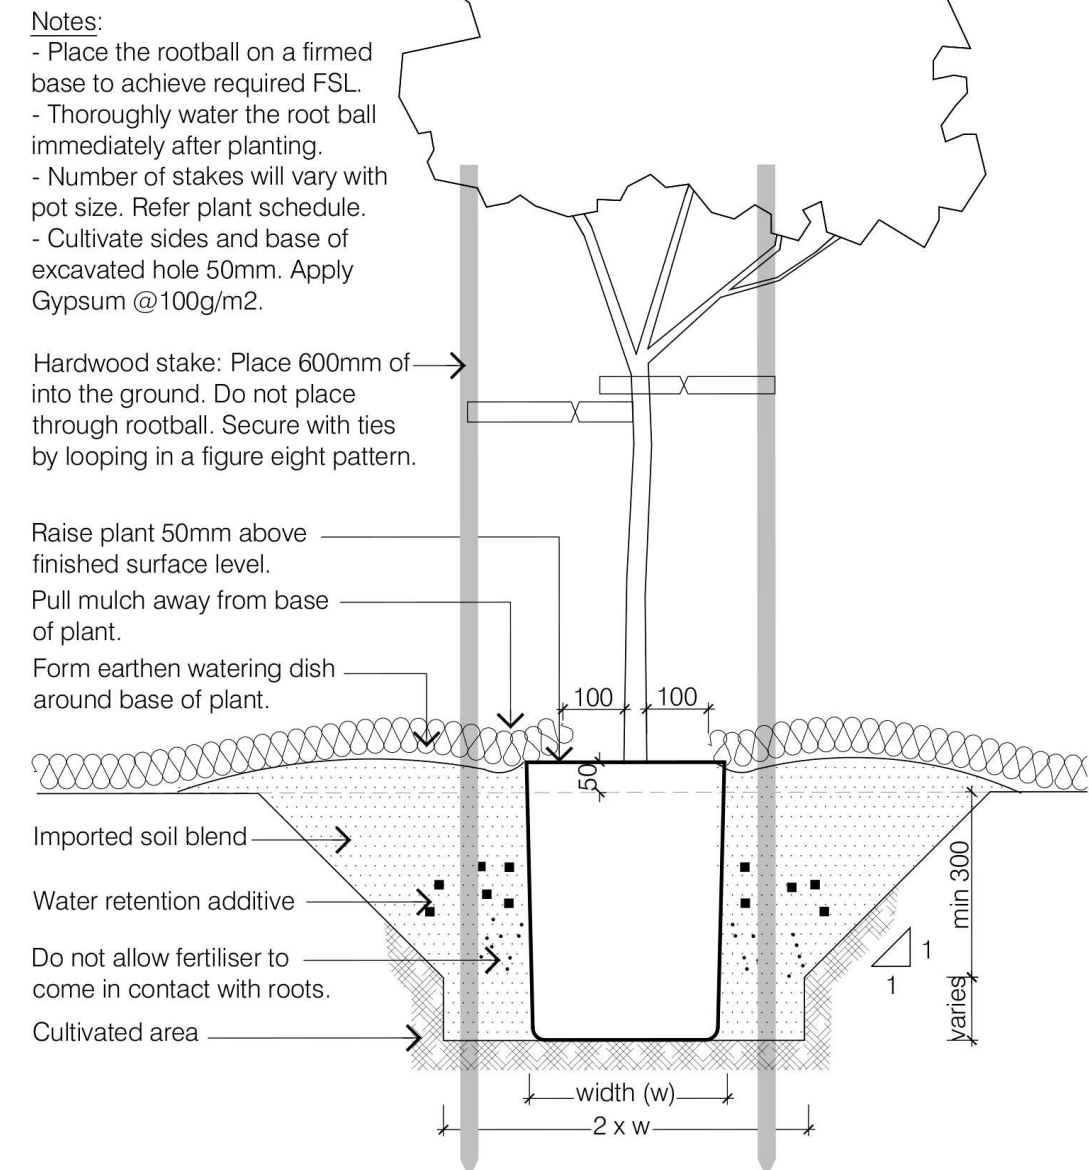


3 PLANTING DETAIL: 45-200Ltr

- Notes:
- Mulch: 100mm deep of 25mm Hoop Pine Mulch
  - Soil: Provide sufficient soil to fill planters to 100mm below top of wall. Lightly compact soil in 200mm layers. Use Premium grade soil blend with high sand content to reduce slumping. Mix with Hydrocell Flake at 30% by volume.
  - Water retention: Provide 100mm thick Hydrocell hard foam to base of planter.
  - Refer to Structural Engineers dwgs for waterproofing, drainage and connections.

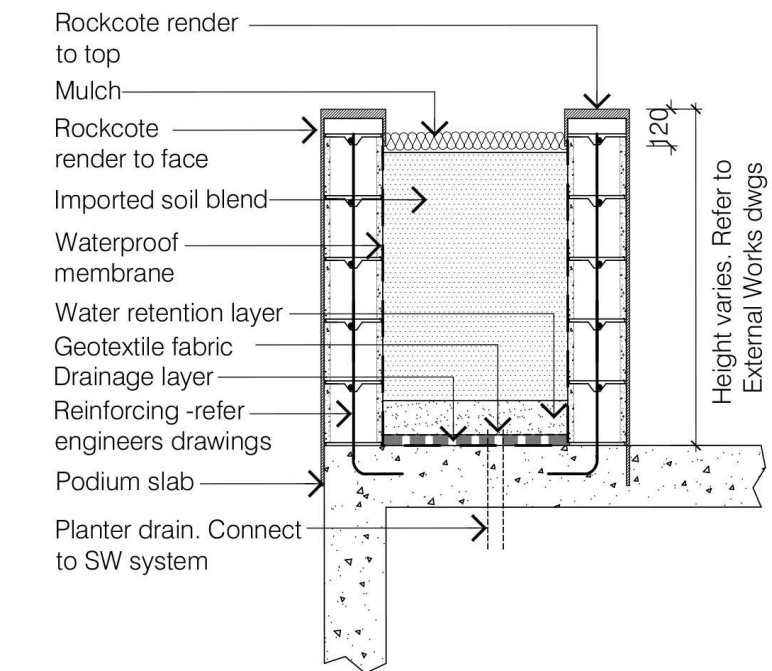


4 PODIUM PLANTING DETAIL

- Notes
- Use edge profile as indicated below.
  - Edge radii shall be 20mm.
  - Install concrete edge on minimum 150 deep compacted base.
  - Finished surface levels shall be as shown on edge profiles.
  - Place tool joints at minimum 5m centres.
  - Make tool joints at equal distances from both ends. Make joint at points of change in curvature/ direction. Joints to be at right angles to direction of edge.

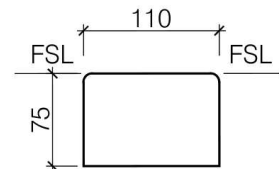

5 EDGE TYPE 1 - EXTRUDED CONCRETE

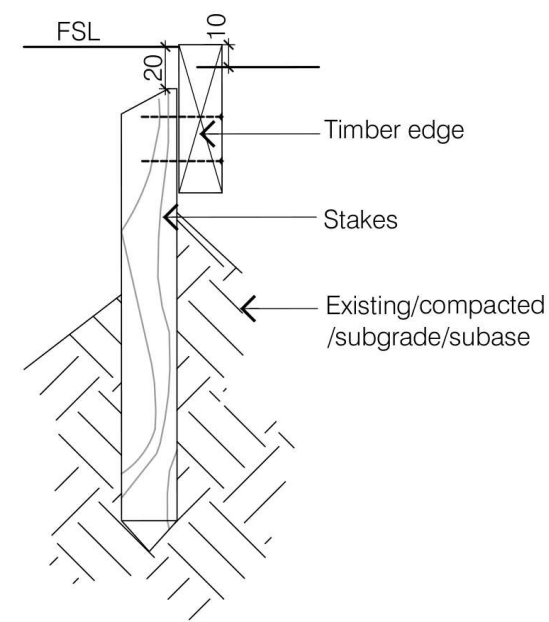

6 EDGE TYPE 2 - TIMBER EDGE


- Notes
- All timber to be treated to AS1604, Hazard 4, rough sawn pine unless otherwise shown.
  - All fixings to be hot dipped galv.
  - Leading edge is to be free of burrs and splinters.

Timber Edge: 120x35mm pine

Stakes: 45x45mm HWD to be 400mm into ground at max. Space at 1200mm centres, or as required to obtain smooth curves. Top of stake to finish 20mm below top of timber edge. Where timber edges meet at corners provide double stakes.


Fixings: 2x60mm galvanised nails

- Notes:
- All subsurface pipes to fall evenly to storm water system.
  - Join drains to upvc conduits on same diameter when placing under paved areas or areas that require compacted sub-base.
  - Sub-soil pipe to be 100mm dia. with filter sock.

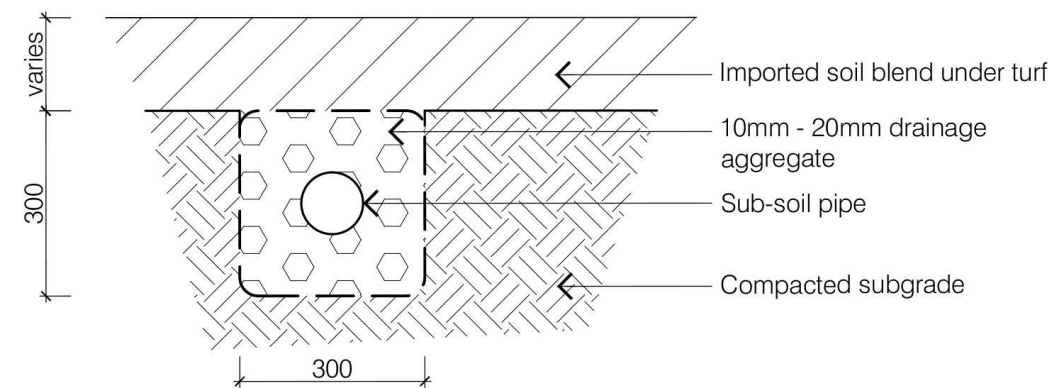

7 SUB SOIL DRAINAGE

- Notes:
- Ensure enough room behind to allow for safe access during construction.
  - Concrete block wall reinforced and core filled.
  - Blocks 390mm x 190mm typical with 10 mm joints.
  - Waterproof membrane to wrap over structural slab. Refer to Structural Engineers specification.
  - Refer plans for adjacent surface treatment.

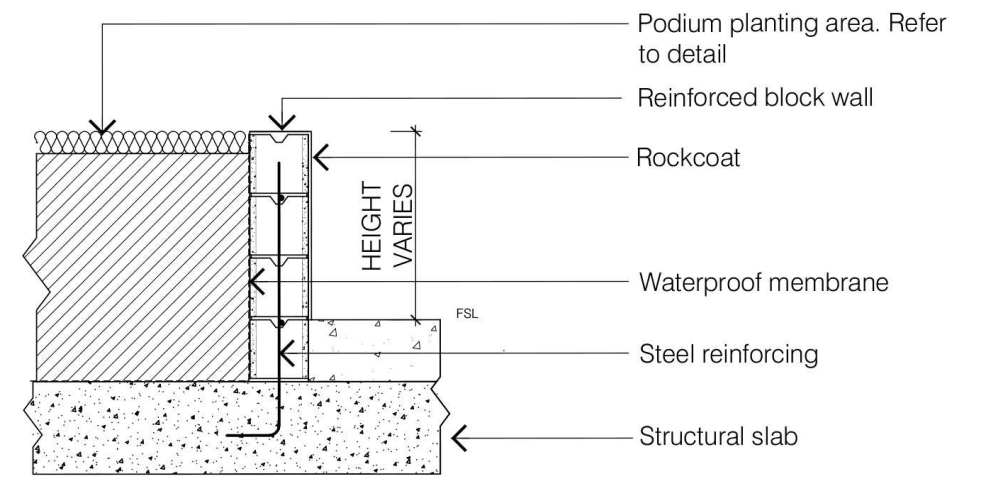

8 WALL TYPE 1



# RESIDENTIAL UNIT DEVELOPMENT NOOSA HEADS

9 BOTTLEBRUSH AVENUE, NOOSA HEADS, QLD 4567

Lot 147 RP 88934

CIVIL WORKS

**NOTE:**

THE FOLLOWING INSPECTIONS MUST BE COMPLETED BY RECOR ENGINEERS BEFORE

ENGINEERING CERTIFICATION WILL BE ISSUED. THE CONTRACTOR IS TO PROVIDE A

MINIMUM OF 72 HOURS NOTICE TO RECOR FOR REQUIRED INSPECTIONS. SHOULD THE

CONTRACTOR FAIL TO REQUEST AN INSPECTION, THE CONTRACTOR WILL BE

RESPONSIBLE FOR ALL COSTS TO ALLOW FOR THE WORKS TO BE INSPECTED TO THE

SATISFACTION OF RECOR. ANY INSPECTIONS THAT FAIL ARE TO BE RE-INSPECTED WITH

ALL REINSPECTION COSTS TO BE PAID BY THE CONTRACTOR.

- a. PRESTART
- b. EARTHWORKS - FINAL STRIPPING OF TOPSOIL, INSTALLATION OF SEDIMENT AND EROSION CONTROL MEASURES UNSUITABLE GROUND
- c. SIDE AND CUT OFF DRAINS
- d. STORMWATER PIPE LAID ON BEDDING PRIOR TO BACKFILL
- e. STORMWATER TRENCH BACKFILLED PRIOR TO PAVEMENT PLACEMENT
- f. STORMWATER STRUCTURE BASE SLABS
- g. SEWER RETICULATION
- h. WATER RETICULATION
- i. PAVEMENT SUBGRADE
- j. PAVEMENT REINFORCING
- k. PAVEMENT PRIOR TO SEALING (PRESEAL)
- l. RETAINING WALL FOOTING REINFORCING
- m. RETAINING WALL BLOCKWORK PRIOR TO CORE FILL
- n. STEEL REINFORCEMENT OF CONCRETE STRUCTURES
- o. PRACTICAL COMPLETION
- p. ON MAINTENANCE
- q. OFF MAINTENANCE
- r. ANY OTHER INSPECTION AS SPECIFIED BY LOCAL COUNCIL (REFER DEVELOPMENT APPROVAL)
- s. ANY OTHER INSPECTION AS REQUIRED BY UNITY WATER AND WHERE RELEVANT TO THEIR CERTIFICATION SCHEME

**GENERAL NOTES**

- 1. ALL DIMENSIONS SHOWN ARE IN METERS UNLESS OTHERWISE SHOWN.
- 2. ALL SETOUT ON SITE IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR TO ALLOW FOR ALL MEANS NECESSARY TO ACCURATELY SETOUT THE WORKS.
- 3. ALL WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH PROJECT SPECIFICATIONS AND WHERE FURTHER DETAILS ARE REQUIRED THE CONTRACTOR SHALL REFER TO NOOSA SHIRE COUNCIL DEVELOPMENT GUIDELINES, LOCAL WATER AUTHORITY GUIDELINES, ASSOCIATED STANDARD DRAWINGS AND SPECIFICATIONS U.N.O.
- 4. SHOULD ANY OF THE CONSTRUCTED WORKS BE CONSTRUCTED OUTSIDE OF THE TOLERANCES SPECIFIED WITHIN THE PROJECT SPECIFICATION AND LOCAL AUTHORITY REQUIREMENTS, THE CONTRACTOR WILL RECTIFY AT THEIR COST INCLUSIVE OF ANY ADDITIONAL COSTS INCURRED BY RECOR.
- 5. EXISTING SERVICES HAVE BEEN PLOTTED FROM SUPPLIED DATA AND AS SUCH THEIR ACCURACY CANNOT BE GUARANTEED. NO RESPONSIBILITY IS TAKEN BY RECOR OR THE PRINCIPAL FOR THE ACCURACY AND COMPLETENESS OF THIS INFORMATION. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ACCURATELY ESTABLISH THE LOCATION AND LEVEL OF ALL EXISTING SERVICES PRIOR TO THE COMMENCEMENT OF ANY WORKS. ANY DISCREPANCIES SHALL BE REPORTED TO THE SUPERINTENDENT. CONTRACTOR TO LOCATE AND PROTECT SERVICES AS REQUIRED DURING PROPOSED WORKS.
- 6. THE CONTRACTOR IS TO CHECK THROUGH LOCATING, POTHOLING AND SURVEY ALL CRITICAL CONNECTION POINTS FOR ALL CIVIL WORKS SHOWN ON THE DRAWINGS INCLUDING ANY POTENTIAL EXISTING SERVICES CLASHES PRIOR TO COMMENCEMENT OF CIVIL WORKS. CONTRACTOR TO IMMEDIATELY REPORT ANY DISCREPANCIES TO RECOR AND AWAIT FORMAL DIRECTION PRIOR TO COMMENCING CIVIL WORKS.
- 7. ON COMPLETION OF SERVICES INSTALLATION, ALL DISTURBED AREAS SHALL BE RESTORED TO ORIGINAL LEVEL, INCLUDING KERBS, FOOTPATHS, CONCRETE AREAS, GRAVEL AREAS, GRASSED AREAS AND ROAD PAVEMENTS.

- 8. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR OF ANY DAMAGE TO AUTHORITY/COUNCIL'S INFRASTRUCTURE. SUCH REPAIR OR REINSTATEMENT TO BE CARRIED OUT IMMEDIATELY TO THE SATISFACTION OF INFRASTRUCTURE OWNER/MANAGER / AUTHORITY/COUNCIL.
- 9. CONTRACTOR TO UNDERTAKE ALL WORKS IN ACCORDANCE WITH ALL WORKPLACE HEALTH AND SAFETY REQUIREMENTS.
- 10. WHERE ANY EXCAVATION OR CONSTRUCTION WORKS ARE TO BE IN CLOSE PROXIMITY TO NEIGHBOURING LOT BOUNDARIES OR INFRASTRUCTURE, CONTRACTOR TO ALLOW IN SCOPE OF WORKS TO PROVIDE ALL MEASURES NECESSARY TO ENSURE THE INTEGRITY OF EXISTING BOUNDARIES AND INFRASTRUCTURE. THIS MAY INCLUDE THE USE OF LOW VIBRATION EQUIPMENT, TRENCH SHORING ETC AS REQUIRED.
- 11. PRIOR TO THE CONTRACTOR COMMENCING ANY WORKS DETAILED ON THESE DRAWINGS, THE CONTRACTOR IS TO NOTIFY RECOR AND RECEIVE WRITTEN CONFIRMATION THAT WORKS CAN COMMENCE.
- 12. CONTRACTOR TO PROVIDE AS CONSTRUCTED DRAWINGS FOR ALL CONSTRUCTED WORKS IN ACCORDANCE WITH LOCAL GOVERNMENT REQUIREMENTS. UNLESS OTHERWISE ADVISED BY RECOR CONTRACTOR TO NOTE COUNCILS ADAC REQUIREMENTS.
- 13. CONTRACTOR TO UNDERTAKE ALL WORKS IN ACCORDANCE WITH RELEVANT APPROVALS.
- 14. CONTRACTOR TO ALLOW TO LIASE/CO-ORDINATE WITH ELECTRICAL, LANDSCAPE AND OTHER SERVICE CONTRACTORS THROUGHOUT CIVIL CONSTRUCTION.
- 15. CONTRACTOR TO ORGANISE ALL DEMOLITION PERMITS PRIOR DEMOLITION WORKS COMMENCING ON SITE.
- 16. CONTRACTOR TO ALLOW TO DEMOLISH ALL EXISTING STRUCTURES, ROADS AND SERVICES WITHIN LIMIT OF WORKS AND REMOVE FROM SITE U.N.O.
- 17. CONTRACTOR TO UNDERTAKE DILAPIDATION REPORT FOR ADJOINING PROPERTIES AND COUNCIL ROADS AND VERGES PRIOR TO COMMENCEMENT OF ANY WORKS ON SITE.
- 18. CONTRACTOR TO CLEAR AND GRUB ALL VEGETATION ON SITE AS IDENTIFIED IN THE APPROVED VEGETATION MANAGEMENT PLAN. CONTRACTOR TO ENSURE ALL TREE ROOTS AND STUMPS ARE COMPLETELY REMOVED AND BACKFILLED TO LEVEL 1 SUPERVISION. CONTRACTOR TO ALLOW TO MULCH ALL CLEARED VEGETATION AND STOCKPILE ON SITE OR REMOVE FROM SITE AS DIRECTED.
- 19. DRAWINGS TO BE READ IN CONJUNCTION WITH THE FOLLOWING CONSULTANTS/CONTRACTORS DRAWINGS:
  - SURVEYOR: SURVEYPLAN
  - ARCHITECT: ZEST BUILDING GROUP
  - HYDRAULICS: TBC
  - STRUCTURAL: RECOR
  - LANDSCAPE: ZEST BUILDING DESIGN

- 20. CONTRACTOR TO PREPARE AND HAVE APPROVED BY RELEVANT AUTHORITY: ROAD OPENING PERMIT AND TRAFFIC MANAGEMENT PLAN FOR ALL WORKS WITHIN COUNCIL ROAD RESERVES. CONTRACTOR TO ALLOW FOR ALL COSTS ASSOCIATED WITH IMPLEMENTATION OF THE TMP.
- 21. ALL WORKS TO BE COMPLETED IN ACCORDANCE WITH ALL LOCAL AUTHORITY APPROVALS RECEIVED FOR THE PROJECT
- 22. CONTRACTOR TO UNDERTAKE ALL WORKS IN ACCORDANCE WITH OPW APPROVALS BY COUNCIL.
- 23. NO WORKS ARE TO BE UNDERTAKEN ON LAND OUTSIDE OF THE SITE BOUNDARY WITHOUT FORMAL APPROVAL BY THE OWNER/CUSTODIAN OF THAT LAND INCLUDING BUT NOT LIMITED TO PRIVATE PROPERTY, ROAD RESERVE, PARKS/OPENSOURCE, EASEMENTS.
- 24. THE CONTRACTOR SHALL HAVE AN APPROVED SET OF CONSTRUCTION DRAWINGS AND APPROVALS ON SITE AT ALL TIMES.
- 25. ALL WATER AND SEWER RETICULATION WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH THE SEQ WATER SUPPLY AND SEWERAGE DESIGN AND CONSTRUCTION CODE (2013).




**LOCALITY PLAN**  
NOT TO SCALE

## OP WORKS ISSUE

APPROVED PLANS  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

|                                                                                 |                |        |       |
|---------------------------------------------------------------------------------|----------------|--------|-------|
|                                                                                 |                |        |       |
|                                                                                 |                |        |       |
|                                                                                 |                |        |       |
|                                                                                 |                |        |       |
| 08/07/21                                                                        | ISSUED FOR OPW | -      | BRP   |
| DATE                                                                            | REVISION       | MARK   | CHK   |
| PROJECT ENGINEER                                                                |                |        |       |
| <div>RECOR</div>                                                                |                |        |       |
| E INFO@RECORCONSULTING.COM<br>A 37 MARY ST NOOSAVILLE, QLD<br>P +61 7 5211 1003 |                |        |       |
| CLIENT                                                                          |                |        |       |
| NOVATO GROUP                                                                    |                |        |       |
| PROJECT                                                                         |                |        |       |
| UNIT DEVELOPMENT<br>9 BOTTLEBRUSH AVENUE<br>NOOSA HEADS                         |                |        |       |
| TITLE                                                                           |                |        |       |
| COVER SHEET AND<br>LOCALITY PLAN                                                |                |        |       |
| PROJECT NO.                                                                     | DRAWING NO.    | STATUS |       |
| 20210008                                                                        | C01            | OPW    |       |
| DRAWN                                                                           | DESIGNED       | SCALE  | ISSUE |
| BRP                                                                             | BRP            | NTS    | A     |



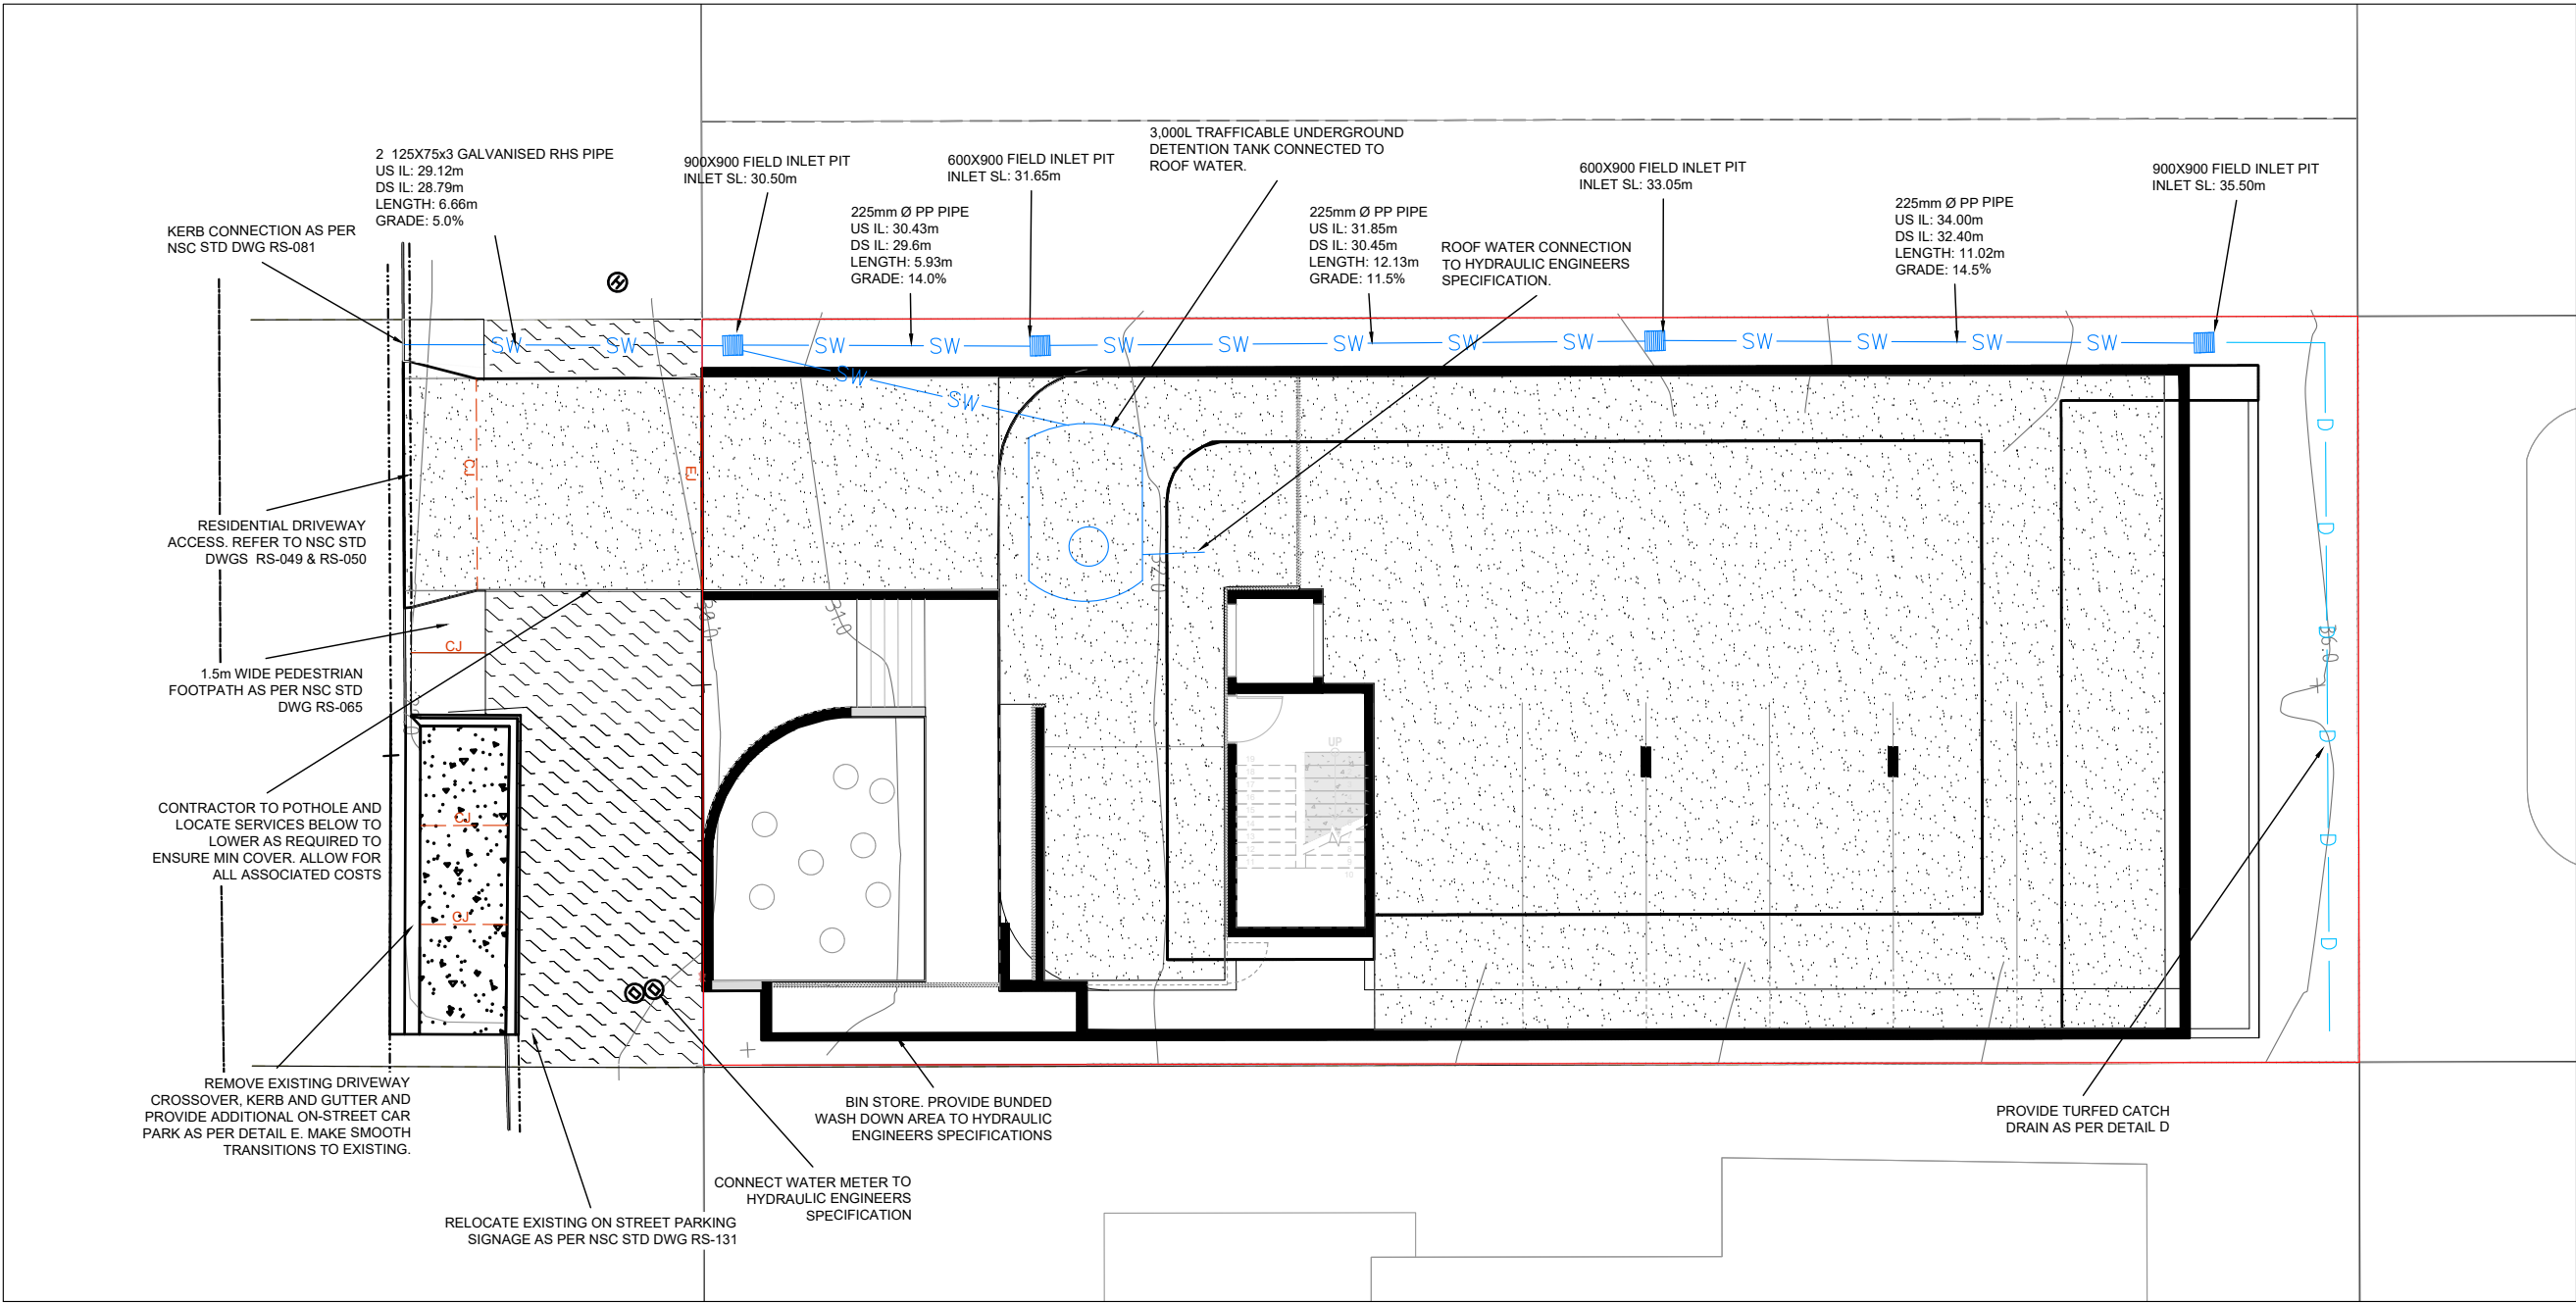

OP WORKS  
ISSUE

LEGEND

CONCRETE DRIVEWAY. 125MM THICK N32 WITH SL72 MESH

VERGE TURFED AREA. REFER ARCHITECTS PLANS.

ON-STREET CONCRETE CAR PARK 150MM THICK N32 WITHSL92 MESH

STORMWATER PIT

APPROVED PLANS  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

|          |                 |      |     |
|----------|-----------------|------|-----|
| 07/09/21 | UPDATED FOR RFI | -    | BRP |
| 08/07/21 | ISSUED FOR OPW  | -    | BRP |
| DATE     | REVISION        | MARK | CHK |

PROJECT ENGINEER

RECOR

E INFO@RECORCONSULTING.COM  
A 37 MARY ST NOOSAVILLE, QLD  
P +61 7 5211 1003

CLIENT

NOVATO GROUP

PROJECT

UNIT DEVELOPMENT  
9 BOTTLEBRUSH AVENUE  
NOOSA HEADS

TITLE

ROADS AND DRAINAGE  
LAYOUT PLAN

|             |             |        |       |
|-------------|-------------|--------|-------|
| PROJECT NO. | DRAWING NO. | STATUS |       |
| 20210008    | C20         | OPW    |       |
| DRAWN       | DESIGNED    | SCALE  | ISSUE |
| BRP         | BRP         | 1:150  | B     |

ROADWORKS AND DRAINAGE NOTES

- REFER HYDRAULIC DRAWINGS FOR BUILDING DRAINAGE DETAILS.
- ALL ROADWORKS AND DRAINAGE (EXTERNAL TO SITE BOUNDARIES AND/OR COUNCIL OWNED DRAINAGE PIPES INTERNAL TO THE SITE BOUNDARIES) CONSTRUCTION AND TESTING TO BE IN ACCORDANCE WITH NOOSA SHIRE COUNCIL DEVELOPMENT GUIDELINES, DRAWINGS AND SPECIFICATIONS.
- ALL DRAINAGE CONSTRUCTION (PRIVATELY OWNED DRAINAGE LINES INTERNAL TO THE SITE BOUNDARIES) CONSTRUCTED AND TESTED TO BE IN ACCORDANCE WITH RELEVANT AUSTRALIAN STANDARDS.
- ALL STORMWATER DRAINAGE PIPES INTERNAL TO SITE SHALL BE: Ø225 PP BLACKMAX OR APPROVED EQUIVALENT.
- ALL STORMWATER DRAINAGE PIPES EXTERNAL TO SITE SHALL BE Ø300 AND GREATER CLASS 2 OR 3 R.C. RUBBER RING JOINTED
- ALL STORMWATER PIPES ARE TO BE MANUFACTURED TO RELEVANT AUSTRALIAN STANDARDS INCLUDING BUT NOT LIMITED TO AS4058 AND AS1992.
- STORMWATER DRAINAGE AND STRUCTURES HAVE BEEN DESIGNED FOR OPERATIONAL LOADS ONLY. CONTRACTOR TO CONSIDER CONSTRUCTION LOADINGS AND ENSURE NO EXCESSIVE LOADS ARE PLACED ON STORMWATER DRAINAGE OR STRUCTURES.
- CONTRACTOR TO CONFIRM LOCATION AND LEVEL OF EXISTING STORMWATER DRAINAGE WHERE CONNECTING ON TO EXISTING.
- CONTRACTOR TO NOTIFY THE SUPERINTENDENT OF ANY UNSUITABLE FOUNDING MATERIAL WITHIN DRAINAGE TRENCH OR STORMWATER STRUCTURES AND AWAIT DIRECTION PRIOR TO LAYING OF PIPES.
- WHERE KERB ADAPTORS ARE TO BE LOCATED ADJACENT TO FOOTPATH CONTRACTOR TO INSTALL 125mm x 75mm x 3mm HOT DIPPED GALVANISED RHS FROM EACH KERB ADAPTOR TO PROPERTY BOUNDARY.
- TRENCH BACKFILL UNDER PAVEMENT TO BE COMPACTED TO 100% STANDARD DRY DENSITY (AS1289 5.1.1) IN LAYERS NOT EXCEEDING 150mm OF CBR 15 MATERIAL OR APPROVED EQUIVALENT. TRENCH BACKFILL IN ROADS TO BE MINIMUM CBR15 MATERIAL UP TO ROAD SUBGRADE LEVEL.
- ALL STORMWATER GRATES/LIDS WITHIN TRAFFICABLE AREAS TO BE CLASS "D" IN ACCORDANCE WITH AS3996.
- ALL GRATES AND LIDS SHALL SIT FLAT WITH ITS SURROUND AND NOT BE LOOSE OR MOVE UNDER WHEEL LOADS.
- ALL STORMWATER STRUCTURES TO BE CONSTRUCTED IN ACCORDANCE WITH PROJECT SPECIFICATION, AND LOCAL AUTHORITY GUIDELINES AND SPECIFICATIONS. WHERE STRUCTURES EXCEED MAXIMUM DEPTH AS IDENTIFIED WITHIN STANDARD DRAWINGS THE CONTRACTOR WILL ENSURE AN ADEQUATE STRUCTURAL DESIGN IS UNDERTAKEN FOR THE SUBJECT STRUCTURE TO BE CONSTRUCTED TO.

- CONTRACTOR TO ENSURE ALL MANHOLE STRUCTURES COMPLY WITH THE MAXIMUM DEPTH SPECIFIED IN THE PROJECT SPECIFICATION OR LOCAL AUTHORITY FROM FINISHED SURFACE LEVEL TO UNDERSIDE OF ROOF SLAB. ANY NON CONFORMANCE IS TO BE RECTIFIED AT THE CONTRACTORS EXPENSE.
- ALL FOOTPATHS TO BE CONSTRUCTED IN ACCORDANCE WITH ARCHITECTURAL/LANDSCAPING DRAWINGS AND RELEVANT AUTHORITY STANDARD DRAWINGS AND SPECIFICATIONS. FOOTPATHS TO BE CONSTRUCTED WITH MAXIMUM 2.5% CROSSFALL. SHOULD CONSTRUCTED FOOTPATHS EXCEED 2.5% CROSSFALL, THE CONTRACTOR WILL BE REQUIRED TO RECTIFY BY REMOVING AND REPLACING AT THEIR COST.
- CONCRETE FOOTPATH TO BE 100mm THICK N32 IN ACCORDANCE WITH AS1679 AND AS3600 UNO
- WHERE A STORMWATER DRAINAGE TRENCH HAS BEEN CONSTRUCTED LONGITUDINALLY IN THE ROAD, THEN THE FINAL PAVEMENT SURFACE REPAIR WIDTH IS TO MATCH THE EXISTING LANE WIDTH AND TERMINATE 50mm CLEAR OF THE ROAD CENTERLINE OR LANE LINE LINEMARKING TO ALLOW FOR THE BITUMEN EMULSION JOINT SEAL. REINSTATEMENT OF SURFACE ADJACENT TO THE KERB OR ROAD PAVEMENT EDGE TO EXTEND FULLY TO THE KERB LINE OR EDGE OF PAVEMENT.
- THE CONTRACTOR IS TO CONFIRM THE LOCATION OF SERVICE CONDUITS WITH THE SUPERINTENDENT PRIOR TO LAYING STORMWATER DRAINAGE. ALL TRENCH EXCAVATION AND CONSTRUCTION SHALL COMPLY WITH THE REQUIREMENTS OF THE QUEENSLAND WORKPLACE HEALTH AND SAFETY ACT 2011.
- REMOVE ANY REDUNDANT DRAINAGE OUTLETS FROM THE KERB AND CHANNEL INCLUDING ANY ASSOCIATED PIPEWORK ACROSS THE FOOTWAY AND REINSTATE THE KERB AND CHANNEL AND THE FOOTWAY AREA IN ACCORDANCE WITH COUNCIL GUIDELINES.
- ROADBASE MATERIAL SHOULD BE PLACED IN LAYERS AT LEAST 75 MM THICK BUT NOT EXCEEDING 150 MM IN THICKNESS, AND COMPACTED TO A MINIMUM DENSITY OF 95% OF THE MAXIMUM DRY DENSITY AS DETERMINED IN ACCORDANCE WITH AUSTRALIAN STANDARD AS1289 6.2.
- CONTRACTOR TO UNDERTAKE ROADWORKS TESTING IN ACCORDANCE WITH NOOSA SHIRE COUNCIL GUIDELINES, DRAWINGS AND SPECIFICATIONS.
- INTERNAL CONCRETE TO BE 125MM THICK (EXCLUDING FINISHED TREATMENTS) N32 IN ACCORDANCE WITH AS1379 AND AS3600. SL72 MESH MIN 50MM TOP COVER TO AS1304. MIN 100MM BASE COURSE WHERE SUBGRADE CBR <=6. SLAB JOINTING OF CONCRETE TO STRUCTURAL ENGINEERS SPECIFICATION

STANDARD SIGNS AND LINE MARKING NOTES


- GENERAL
  - ALL SIGNS AND PAVEMENT MARKING IS TO BE IN ACCORDANCE WITH THE QUEENSLAND TRANSPORT MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (CURRENT EDITION).
- SIGNS

- ALL SIGNS TO BE REFLECTORISED CLASS 1 TO AS1906.1:2007 UNLESS NOTED OTHERWISE.
- SIGNS ARE TO BE INSTALLED WITH THE FOLLOWING CLEARANCES TO EDGE OF SIGN:
  - LOCATION CLEARANCE NO KERB 600 BEHIND GUIDE POSTS BARRIER KERB 300 FROM FACE MOUNTABLE KERB 500 FROM FACE OF KERB.
  - PARKING CONTROL SIGNS TO BE MOUNTED TO FACE APPROACHING TRAFFIC AT 45° TO KERB OR CARRIAGEWAY EDGE. ALL OTHER SIGNS TO BE TURNED AWAY BY 5° FROM THE NORMAL TO APPROACHING HEADLIGHT.
- SIGN SUPPORTS
  - SLEEVED SIGNS SUPPORTS ARE TO BE PROVIDED IN ALL AREAS WHERE THEY ARE IN A PAVED SURFACE.
- LINEMARKING
  - REDUNDANT LINEMARKING IS TO BE GROUND OFF.
  - THERMOPLASTIC LINEMARKING TO BE USED FOR ALL CONCRETE.




**NOTE:**  
EXCEPT WHERE NOTED ON PLAN AND ASSOCIATED DESIGN DRAWINGS, ALL IN-GROUND SERVICES WITHIN THE PROPERTY BOUNDARY INCLUDING BUT NOT LIMITED TO: STORMWATER DRAINAGE, SEWERAGE, WATER, GAS, ELECTRICAL AND COMMUNICATIONS TO BE SAFELY BE DISCONNECTED, REMOVED FROM SITE AND CAPPED OFF AT SITE BOUNDARY. CONTRACTOR TO ARRANGE ALL NECESSARY APPLICATIONS AND PERMITS WITH THE RELEVANT AUTHORITIES. SERVICES TO BE CAPPED IN ACCORDANCE WITH RELEVANT SERVICE PROVIDER SPECIFICATIONS AND STANDARD DETAILS




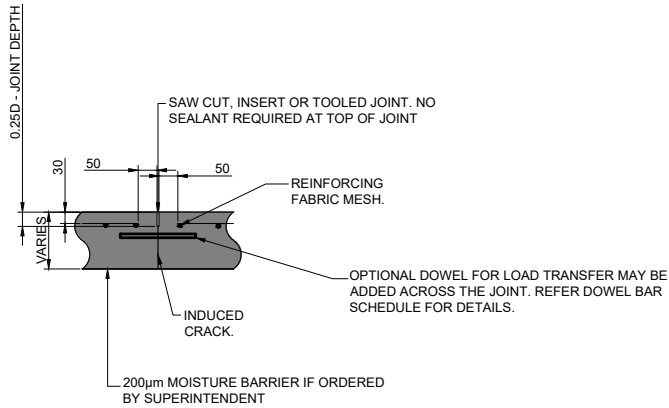


DETAIL A - CONTROL JOINT (CJ)  
SCALE: 1:16

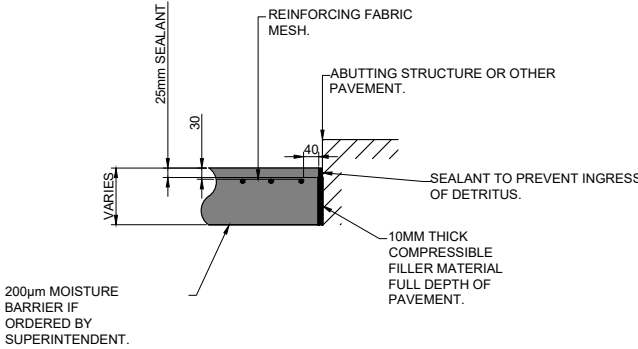

DETAIL B- ISOLATION JOINT (IJ)  
SCALE: 1:16

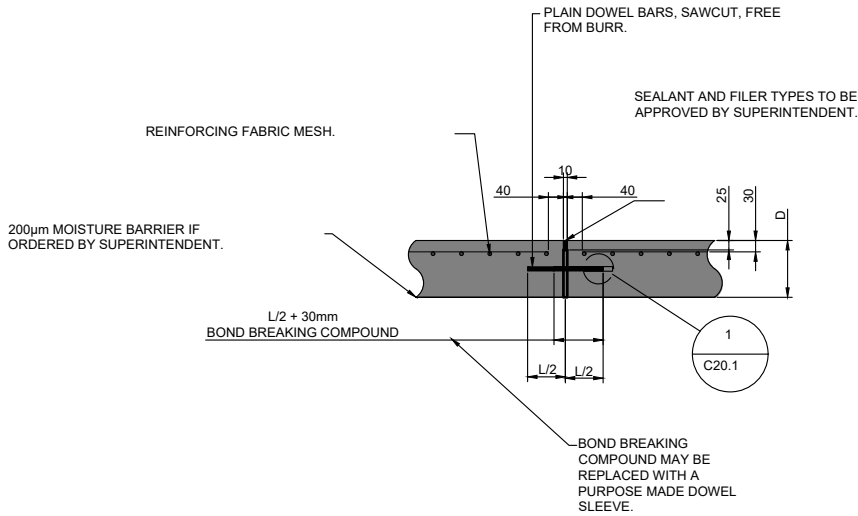


DETAIL C - EXPANSION JOINT (EJ)  
SCALE: 1:16

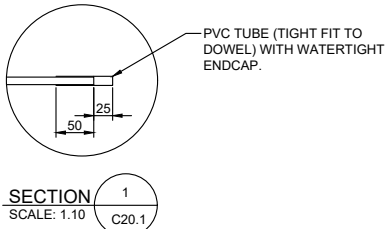


JOINTING NOTES

- ALL JOINTING AND CONCRETE TO BE IN ACCORDANCE WITH THE REQUIREMENTS OF AS3727.1:2016.
- SAW CUT JOINTS MUST BE:
  - BETWEEN  $\frac{1}{4}$  AND  $\frac{3}{4}$  OF CONCRETE PAVEMENT DEPTHS.
  - CLEARED OF ANY DEBRIS FROM THE CUTTING METHOD.
  - PERFORMED WITHIN 6 TO 12 HOURS OF FINISHING CONCRETE POURS.
- DOWEL BARS MUST BE INSTALLED EXACTLY 90° TO THE FACE OF JOINT TO ALLOW EXPANSION AND CONTRACTION MOVEMENTS.
- JOINTING LAYOUT TO BE CONFIRMED BY SUPERINTENDANT PRIOR TO CONSTRUCTION COMMENCING. LAYOUT SHOULD AVOID ACUTE ANGLES IN THE CONCRETE SLAB AND AVOID MISMATCHED JOINTS.
- JOINT SEALANTS WHERE USED MUST ADHERE TO SIDE OF JOINT FACES ONLY AND SHALL NOT EXTEND ABOVE SIDES OF JOINTS ONTO THE SLAB SURFACE.
- DOWEL BARS ARE TO BE
  - FOR 100MM THICK SLAB, 12MM Ø OF LENGTH 300MM AND SPACED AT 400MM CENTRES
  - FOR 125MM THICK SLAB, 16MM Ø OF LENGTH 350MM AND SPACED AT 300MM CENTRES
  - FOR 150MM THICK SLAB, 20MM Ø OF LENGTH 400MM AND SPACED AT 300MM CENTRES
  - FOR 200MM THICK SLAB, 24MM Ø OF LENGTH 40MM AND SPACED AT 300MM CENTRES

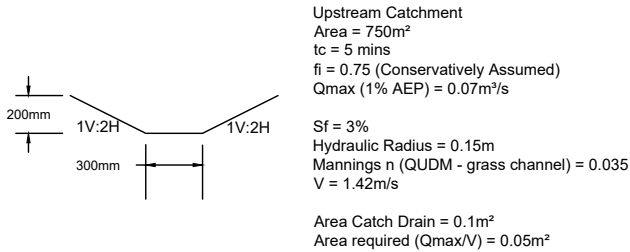

DETAIL D - TURFED CATCH DRAIN  
SCALE: NTS

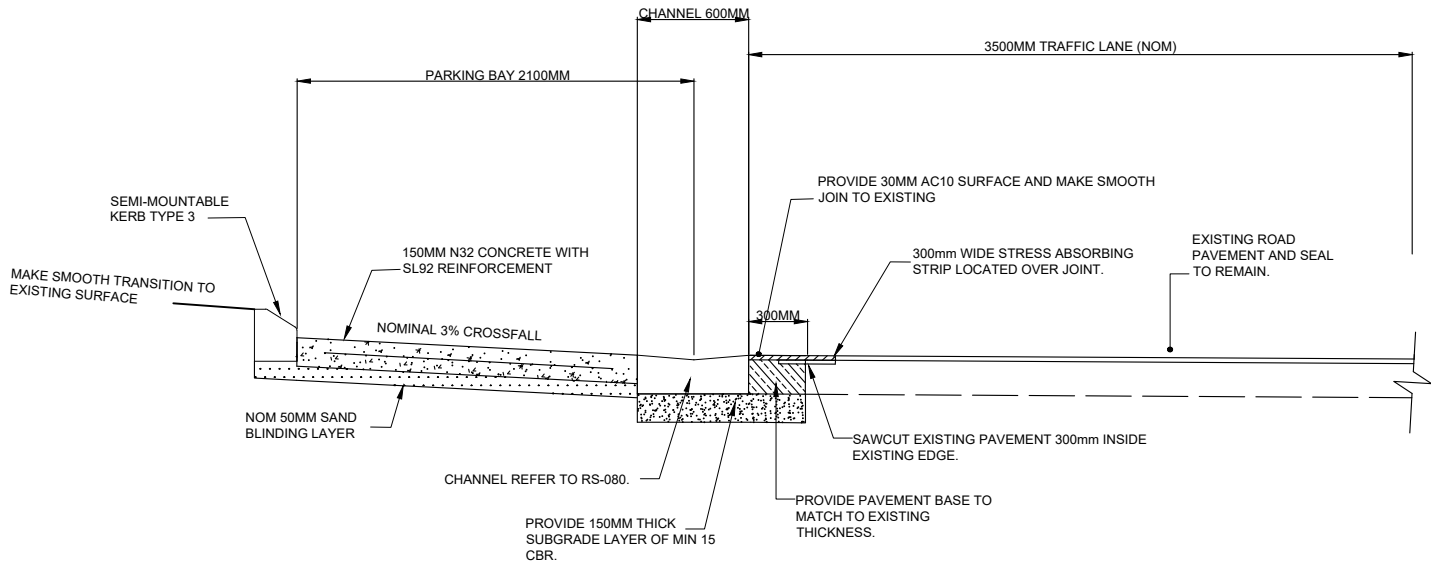

DETAIL E - ON STREET PARKING SECTION  
SCALE: NTS

|          |                 |      |     |
|----------|-----------------|------|-----|
| 07/09/21 | UPDATED FOR RFI | -    | BRP |
| 08/07/21 | ISSUED FOR OPW  | -    | BRP |
| DATE     | REVISION        | MARK | CHK |

PROJECT ENGINEER

**RECOR**  
E INFO@RECORCONSULTING.COM  
A 37 MARY ST NOOSAVILLE, QLD  
P +61 7 5211 1003

CLIENT  
**NOVATO GROUP**

PROJECT  
**UNIT DEVELOPMENT  
9 BOTTLEBRUSH AVENUE  
NOOSA HEADS**


TITLE  
**ROADS AND DRAINAGE  
DETAILS**

|                         |                    |               |            |
|-------------------------|--------------------|---------------|------------|
| PROJECT NO.<br>20210008 | DRAWING NO.<br>C21 | STATUS<br>OPW |            |
| DRAWN<br>BRP            | DESIGNED<br>BRP    | SCALE<br>NTS  | ISSUE<br>A |




EARTHWORKS NOTES


- FOR GENERAL NOTES REFER DWG C01, WHICH IS TO BE REQUESTED AND VIEWED PRIOR TO COMMENCEMENT OF CONSTRUCTION IF NOT SUPPLIED.
- FOR DETAILED GEOTECHNICAL INFORMATION, REFER GEOTECHNICAL INVESTIGATION REPORT BY TECTONIC. IT IS RECOMMENDED THAT THE GEOTECHNICAL CONSULTANT BE CONTACTED TO CONFIRM THE SOIL CONDITIONS PRIOR TO EARTHWORKS COMMENCING.
- GRASS AND TOPSOIL SHALL BE STRIPPED TO A MINIMUM DEPTH OF 100MM OVER THE EXTENT OF THE WORKS UNLESS DIRECTED OTHERWISE AND STOCKPILED WHERE REQUIRED FOR FILL OF LANDSCAPING AREAS. TOPSOIL MATERIALS MUST NOT BE USED IN STRUCTURAL FILL.
- UNSUITABLE NATURAL MATERIALS SUCH AS SATURATED, LOOSE OR SOFT MATERIALS ENCOUNTERED SHOULD BE REMOVED DURING SUBGRADE PREPARATION FOR BULK EARTHWORKS. ALL UNSUITABLE MATERIAL TO BE REMOVED FROM SITE AT CONTRACTORS EXPENSE.
- COMPACTION OF THE EXPOSED SAND SUBGRADE REQUIRES SUBSTANTIAL VOLUMES OF WATER COMBINED WITH VIBRATORY COMPACTION EQUIPMENT. CARE MUST BE TAKEN TO ENSURE THERE ARE NO IMPACTS ON SURROUNDING STRUCTURES. MATERIAL TO BE COMPACTED IN ACCORDANCE WITH GEOTECHNICAL REPORT AND AS1289.
- A MINIMUM 150MM THICK GRANULAR WORKING PLATFORM MAY BE REQUIRED ON SOIL SUBGRADES ALONG HAUL ROADS AND LAYDOWN AREAS TO IMPROVE TRAFFICABILITY. SPECIFIC PLATFORM DESIGN WOULD BE REQUIRED PRIOR TO MOBILISATION AND TRAFFICKING OF ANY HEAVY MOBILE PLANT ON THE SITE.
- IMPORTED GENERAL FILL MATERIAL SHALL BE SUPPLIED AND COMPACTED WHERE UNSUITABLE NATURAL MATERIALS ARE LOCATED AND AS OTHERWISE NECESSARY TO OBTAIN SUBGRADE/PLATFORM LEVEL. IMPORTED GENERAL FILL MATERIAL SHALL BE CLEAN GRADED MATERIAL FREE OF ORGANIC MATTER AND STONES, WITH MAXIMUM PARTICLE SIZE OF 100mm AND CAPABLE OF BEING COMPACTED INTO COHERENT FILLING TO THE SPECIFIED STANDARD. THE MATERIAL SHALL HAVE A MAXIMUM PLASTICITY INDEX OF 15%, A SHRINK-SWELL INDEX OF LESS THAN OR EQUAL TO 1% AND A MINIMUM C.B.R. OF 10%.
- ALL EARTHWORKS TO BE CARRIED OUT AT +/- 2% OPTIMUM MOISTURE CONTENT FOR STANDARD COMPACTION.
- ANY PROPOSED RETAINING WALL WORKS MUST BE WHOLLY WITHIN THE PROPERTY BOUNDARY OF THE SUBJECT SITE, INCLUDING REAR OF RETAINING WALL DRAINAGE INFRASTRUCTURE FOR RETAINING WALLS IN CUT. RETAINING WALLS ARE TO BE PREPARED IN ACCORDANCE WITH STRUCTURAL ENGINEERS SPECIFICATIONS, AND IN CONFORMANCE WITH CONSTRUCTION REQUIREMENTS OF GEOTECHNICAL REPORT.
- REFER ARCHITECT/LANDSCAPE ARCHITECT DRAWINGS FOR CONFIRMATION OF RETAINING WALL COLOUR AND FINISH.
- ALL EARTHWORKS OPERATIONS SHALL BE CARRIED OUT WITH 'LEVEL 2' SOIL ENGINEERING SUPERVISION IN ACCORDANCE WITH APPENDIX B OF AS 3798. THE NOMINATED GEOTECHNICAL TESTING AUTHORITY SHALL PROVIDE CERTIFICATION THAT ALL GENERAL EARTHWORKS OPERATIONS HAVE BEEN CARRIED OUT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS AND THE CONTROLLED FILL IS SUITABLE FOR PURPOSE TO THE REQUIRED BEARING CAPACITY UNDER THE PLATFORM/STRUCTURES AS SPECIFIED BY THE GEOTECHNICAL REPORT.
- ALL EARTHWORKS FILL AND EXCAVATED AREAS SHALL BE COMPACTED TO 98% STANDARD MAXIMUM DRY DENSITY OR A DRY DENSITY INDEX OF AT LEAST 75% IN ACCORDANCE WITH THE GEOTECHNICAL REPORT IN LAYERS OF 250MM LOOSE THICKNESS (PRIOR TO COMPACTION).
- COMPACTION TESTING TO BE CARRIED OUT AT A MINIMUM OF TWO TESTS PER VERTICAL LIFT WHERE STRUCTURAL FILL HEIGHTS EXCEED 300mm IN ACCORDANCE WITH AS3798. CONTRACTOR TO UNDERTAKE ALL EARTHWORKS TESTING IN ACCORDANCE WITH GEOTECHNICAL ENGINEER AND LOCAL AUTHORITY REQUIREMENTS.
- FINISHED SURFACES TO ALL DISTURBED AREAS ARE TO BE TREATED IN ACCORDANCE WITH LANDSCAPE DRAWINGS.
- ALL NEW WORKS TO MATCH NEATLY INTO EXISTING LEVELS.
- ALL WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH APPROVED MANAGEMENT PLANS.
- CONTRACTOR TO ENSURE SUITABLE EROSION CONTROL MEASURES ARE INSTALLED INCLUDING BUT NOT LIMITED TO SHAKE DOWNS, SILT FENCE ETC IN ACCORDANCE WITH EROSION AND SEDIMENT CONTROL PLAN.
- ADEQUATE SAFETY FENCING/BARRIERS TO BE APPLIED TO ALL BATTERS OR RETAINING WALLS (TEMPORARY OR PERMANENT) AS PER RELEVANT AUSTRALIAN STANDARDS AND LEGISLATION.
- DUST CONTROL MEASURES ARE TO INCLUDE SPRAYING WATER ON UNPAVED ROADS, ACCESS TRACKS AND STOCKPILES AT A SUFFICIENT LEVEL TO SUPPRESS DUST GENERATION. ADDITIONALLY CONTRACTORS ARE TO COVER OR ENCLOSE STOCKPILES WHERE REASONABLY PRACTICAL TO RESTRICT DUST MOVEMENT.
- PRIOR TO THE CONTRACTOR COMMENCING ANY WORKS DETAILED ON THIS DRAWING, THE CONTRACTOR IS TO NOTIFY RECOR AND RECEIVE WRITTEN CONFIRMATION THAT WORKS CAN COMMENCE.
- ALL EXCAVATIONS ARE TO BE CONDUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF THE GEOTECHNICAL ENGINEER AS OUTLINED IN THE GEOTECHNICAL INVESTIGATION REPORT BY TECTONIC. TEMPORARY UNSURCHARGED CUTS IN LOOSE TO VERY LOOSE SAND TO BE FORMED AT 1V:2H, AND IN MEDIUM DENSE SAND AT 1V:1H FOR BATTERS UP TO 3M IN HEIGHT. DEEPER CUTS ARE TO BE ASSESSED BY THE GEOTECHNICAL ENGINEER.
- WHERE THE ABOVE TEMPORARY BATTER SLOPES CAN NOT BE ACHIEVED, TEMPORARY SHORING WILL BE REQUIRED UNDER THE ADVICE OF A SPECIALIST SHORING CONTRACTOR.
- EXCAVATIONS IN PROXIMITY TO EXISTING STRUCTURES WILL REQUIRE SPECIFIC DESIGN TO PREVENT UNDERMINING WHICH SHOULD BE CARRIED OUT BY A SUITABLY QUALIFIED AND EXPERIENCED RPEQ STRUCTURAL ENGINEER.
- CONTRACTOR'S RPEQ GEOTECHNICAL ENGINEER IS TO CONFIRM THAT ANY CONSTRUCTED CUT/FILL BATTERS AND RETAINING STRUCTURES ON THE SITE HAVE ACHIEVED ADEQUATE STABILITY WITH A LONG-TERM FACTOR OF SAFETY AGAINST GEOTECHNICAL FAILURES TO THEIR SATISFACTION.
- EARTHWORKS LEVELS SHOWN ARE FINISHED SURFACE LEVELS INCLUSIVE OF TOPSOIL LAYER. REFER TO STRUCTURAL ENGINEERING DRAWINGS FOR BUILDING SLAB THICKNESSES AND HYDRAULIC DRAWINGS FOR SUB-FLOOR DRAINAGE FOR DETERMINATION OF REQUIRED BULK EARTHWORKS SURFACE.
- ANY PRELOADING REQUIRED IS TO OCCUR IN ACCORDANCE WITH THE GEOTECHNICAL ENGINEERS REQUIREMENTS. CONTRACTOR TO ALLOW FOR THE IMPORT AND REMOVAL OF ALL NECESSARY MATERIAL TO UNDERTAKE THE PRELOADING OPERATIONS.
- REFER ARCHITECTURAL DRAWINGS FOR BUILDING SETOUT.

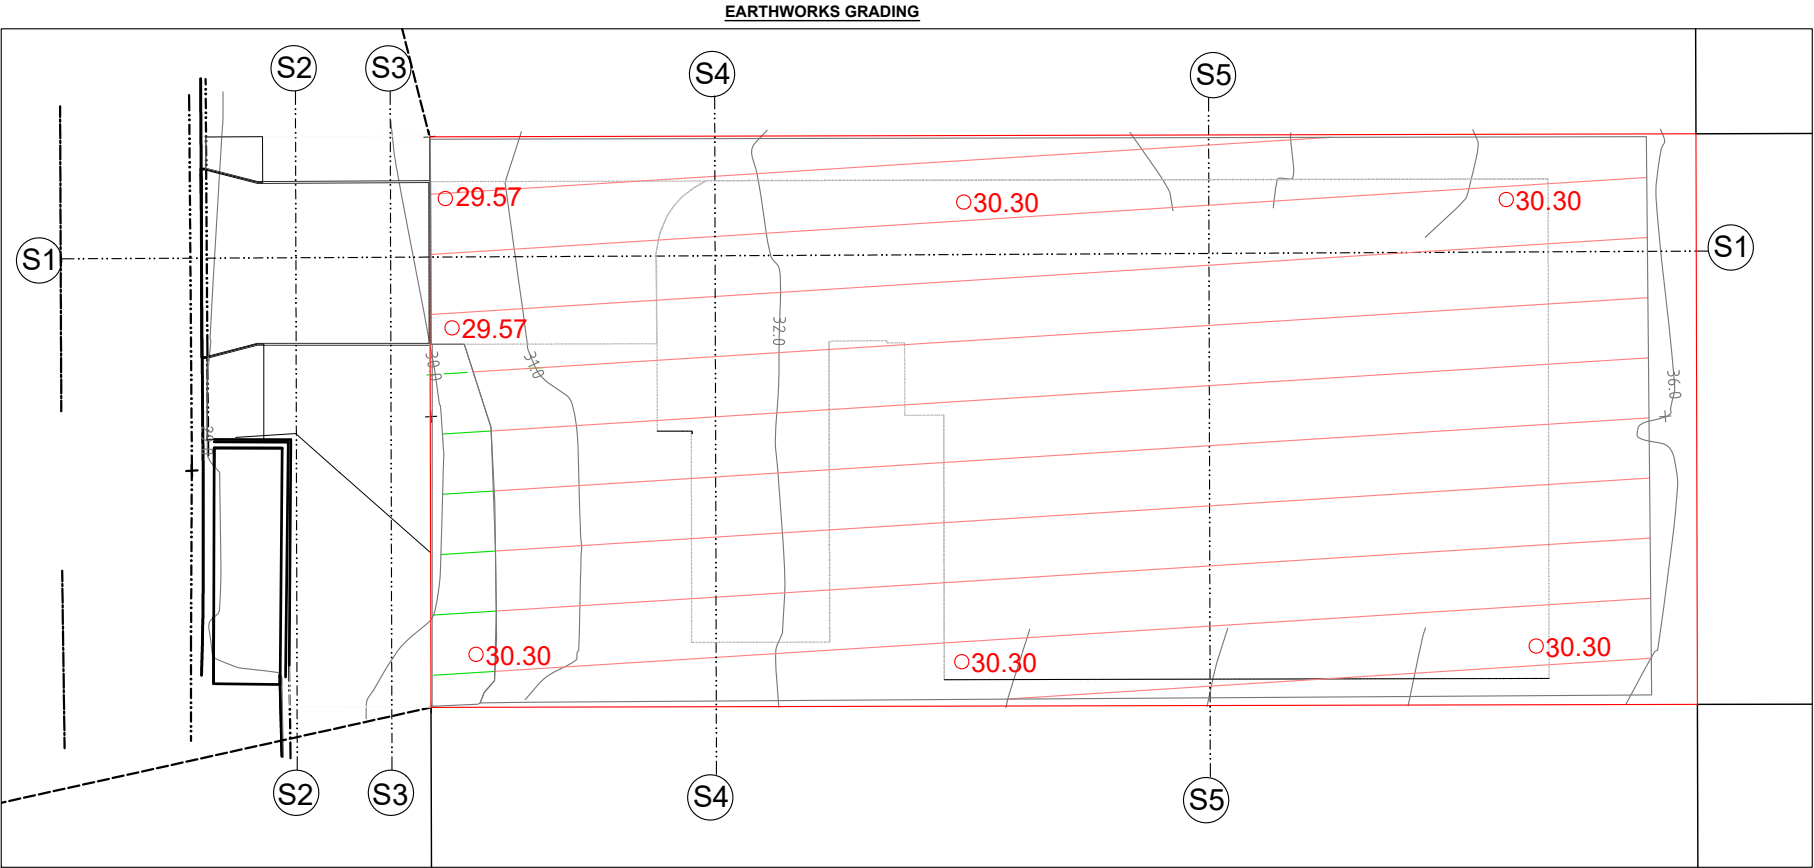


S1 - DRIVEWAY SECTION VIEW

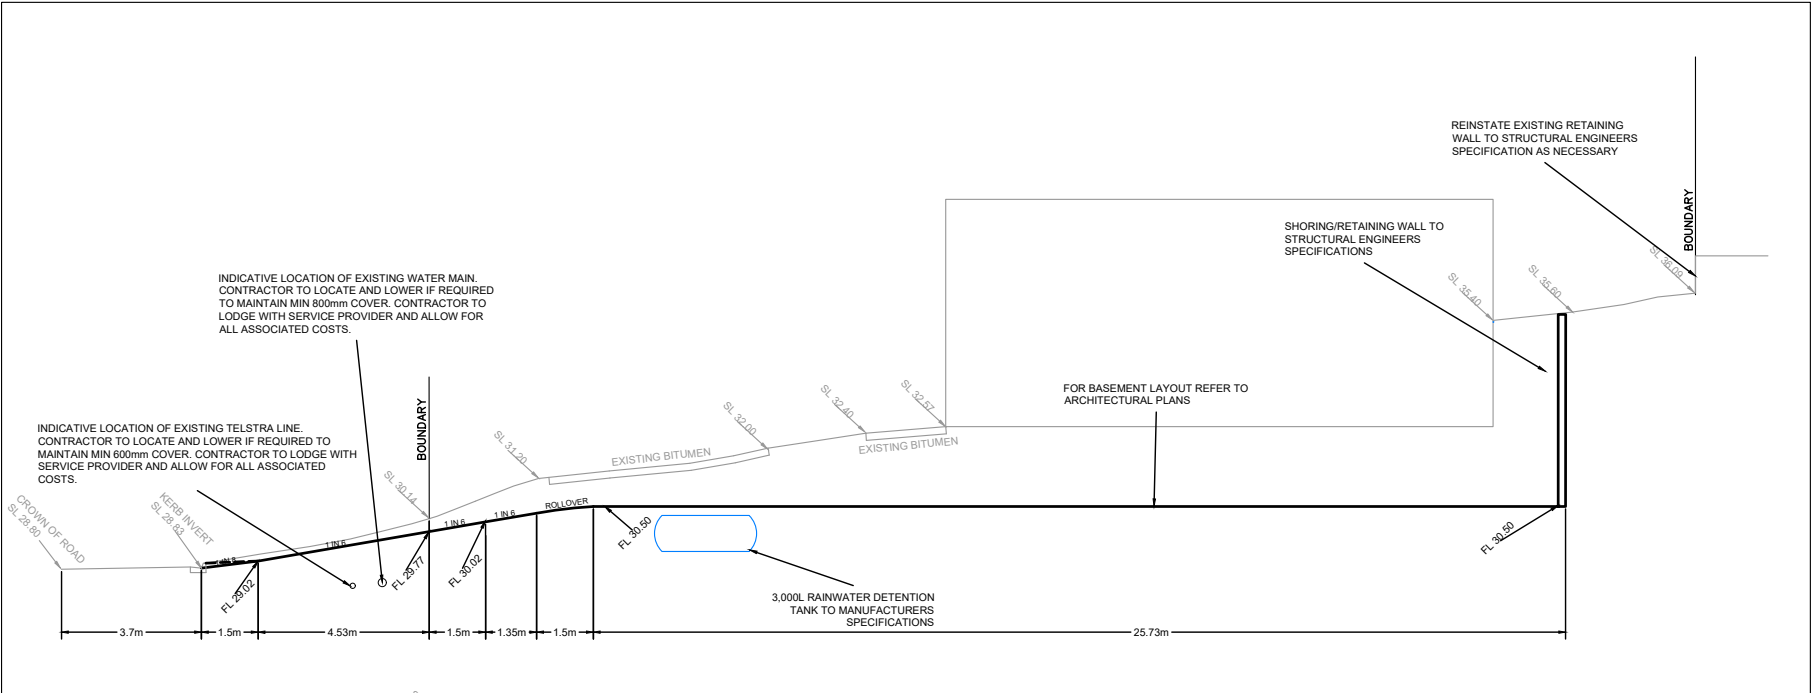


S2 - DRIVEWAY ACCESS SECTION

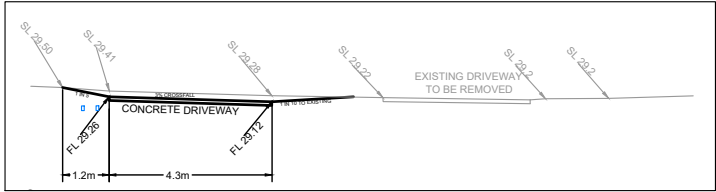


S3 - DRIVEWAY ACCESS SECTION

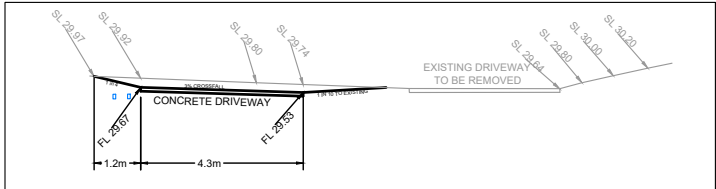

S4 - EXTERNAL PARKING SECTION

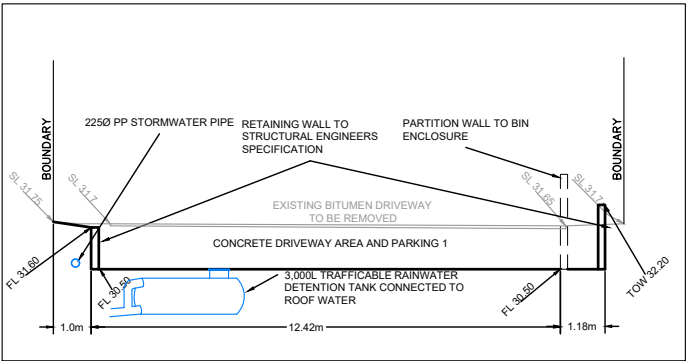

S5 - INTERNAL PARKING SECTION

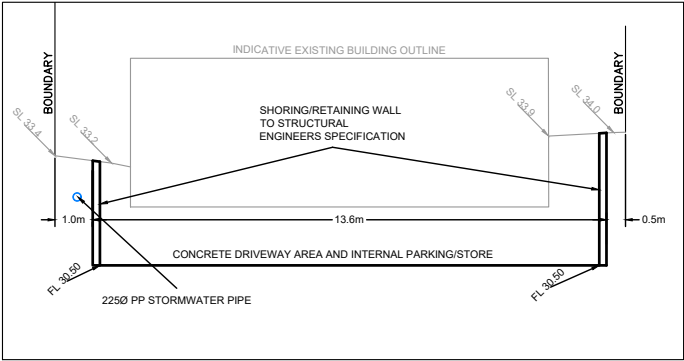

OP WORKS

ISSUE



EARTHWORKS CUT



EARTHWORKS FILL



FINISHED EARTHWORKS LEVEL

APPROVED PLANS  
MCU21/0133 & OPW21/0220  
NOOSA COUNCIL  
5 NOVEMBER 2021

|          |                 |      |     |
|----------|-----------------|------|-----|
|          |                 |      |     |
|          |                 |      |     |
| 07/09/21 | UPDATED FOR RFI | -    | BRP |
| 08/07/21 | ISSUED FOR OPW  | -    | BRP |
| DATE     | REVISION        | MARK | CHK |

PROJECT ENGINEER

**RECOR**

E INFO@RECORCONSULTING.COM  
A 37 MARY ST NOOSAVILLE, QLD  
P +61 7 5211 1003

CLIENT

NOVATO GROUP

PROJECT

UNIT DEVELOPMENT  
9 BOTTLEBRUSH AVENUE  
NOOSA HEADS

TITLE

BULK EARTHWORKS AND  
SITE SECTIONS

|                         |                    |                |            |
|-------------------------|--------------------|----------------|------------|
| PROJECT NO.<br>20210008 | DRAWING NO.<br>C30 | STATUS<br>OPW  |            |
| DRAWN<br>BRP            | DESIGNED<br>BRP    | SCALE<br>1:200 | ISSUE<br>B |